

# Table of Contents

## INDEX

Year Model decoder .....	68
--------------------------	----

## INTERNAL

Piston Kits .....	3
Con Rods .....	9
Sleeves .....	5
Bearings .....	6
Bolts .....	8
Crankshafts .....	8
Crankshaft seal kits .....	10
Flywheel Keys .....	8
Gaskets & Gasket Kit Application .....	22
<i>Gasket set images</i> .....	23
<i>Head gasket images</i> .....	25
<i>Head cover images</i> .....	26
<i>Base gaskets</i> .....	27
<i>Intake gaskets</i> .....	28
<i>Exhaust gaskets</i> .....	29
<i>Thermostat gaskets</i> .....	32

## FUEL SYSTEM

Fuel Pumps & Kits .....	35
<i>Fuel pump diaphragms</i> .....	36
Fuel lines .....	36
<i>Connectors</i> .....	38
Carby Kits .....	33
<i>Needle &amp; Seats</i> .....	34
Fuel filters .....	37
<i>Raycor</i> .....	39

## IGNITION COMPONENTS

Ignition Coils .....	12
Spark plug wire .....	13
Points Condensers .....	11
CDI Electronics .....	19
<i>Power pack images</i> .....	21
<i>Stator images</i> .....	21

## ELECTRIC COMPONENTS

Solenoids Relays .....	11
Electrical Guide .....	19
Regulators Rectifiers .....	21
Ignition switches .....	12
Stop switches .....	12
Battery Components .....	12

<b>COOLING SYSTEM</b>	<b>40</b>
Application	40
Water Pump Kits & Components	43
Impellers	42
<i>Impeller images</i>	42
Water pump gaskets	30
Water pump keys	47
Cups	47
Wear plates	46
Housings & Bases	45
Thermostats	32
<i>Thermostat Gaskets</i>	32
Water pump key	8
<b>MIDSECTION</b>	
Tilt Tubes	53
Trim seals	18
<b>DRIVE COMPONENTS</b>	
Propeller Components	50
Gear Case Seal Kits	48
Cover nuts	50
Gear shift boots	32
<b>SERVICE &amp; MISC</b>	
Throttle Cables	52
Raycor	39
Oil Filters	39
Timing belts	8
<b>ARCO STARTER &amp; TRIM COMPONENTS</b>	
Starter Motors	13
Trim Motors	15
Relays	18
<b>VALUE STARTERS &amp; TRIM MOTORS</b>	
INDEX	
YAMAHA STARTER MOTOR IMAGES	55
YAMAHA STARTER KIT IMAGES	59
YAMAHA TRIM MOTOR IMAGES	59
YAMAHA SOLENOIDS & RELAY IMAGES	62
YAMAHA MODEL DECODER	68
YAMAHA STARTER APPLICATION BY YEAR - HP	69
<b>STARTER PARTS</b>	<b>64</b>
BRUSHES	64
STARTER DRIVES (BENDIX)	65

# SOUTHSIDE MARINE COMPONENTS

YAMAHA PISTON KITS			1MM = 40 Thou      .75MM = 30 Thou .50MM = 20 Thou    .25MM = 10 Thou		
Model	Cyl	Piston Size	Bore Size	Piston Kit	Piston Rings
6-8B HP 80-82 1985	2	STD 0.25MM 0.50MM	N/A N/A N/A	677-11631-00 677-11635-00 677-11636-00	N/A N/A N/A
9.9 - 15HP 84-97	2	STD 0.50MM	56MM 56.5MM	6E7-11631-00 6E7-11636-00	6E7-11610-00 6E7-11610-20
25 HP 84-86	2	STD	72MM	689-11631-00	689-11610-21
30 HP 84-86		0.50MM	72.5 MM	689-11636-00	689-11610-60
C Series 89-92					
C30 89, 91-97					
E25F 88-90	2	STD 0.50MM	67MM 67.5MM	6G0-11631-00 6G0-11636-00	6G0-11610-00 6G0-11610-20
20C 81-86 20CM 93-94 25A 1978 25D 81-90 28A 78-79	2	STD 0.50MM	67MM 67.5MM	6G0-11631-00 6G0-11636-00 (REPLACES 664 PISTONS)	N/A (6G0 RINGS WILL NOT FIT THESE MOTORS)
25HP A-Series	2	STD 0.50MM	67MM 67.5MM	6G0-11631-00 6G0-11636-00	6G0-11610-00 6G0-11610-20
40 HP	2	STD 0.50MM	75MM 75.5MM	676-11631-00 676-11636-60	676-11610-60 N/A
20 - 25 HP 88 - 11	2	STD 0.50MM	67MM 67.5MM	6L2-11631-00 6L2-11636-00	N/A N/A
20 - 30 HP CV	2	STD 0.50MM	72MM 72.5MM	61N-11631-00 61N-11636-00	61N-11603-00 N/A
40 HP ENDURO (Some 78mm, CHECK)	2	STD 0.50MM	80MM 80.5MM	66T-11631-01 66T-11636-01	66T-11603-00 N/A
40 - 50 HP 3 Ring	3	STD 0.25MM 0.50MM	67MM 67.25MM 67.5MM	6H4-11631-00 6H4-11635-00 6H4-11636-00	6H4-11610-02 6H4-11610-10 6H4-11610-22
40- 50 HP 2 Ring 89 - 11	3	STD 0.25MM 0.50MM 0.75MM 1MM	67MM 67.25MM 67.5MM 67.75MM 68MM	63D-11631-00 63D-11635-00 63D-11636-00 100-252-06K 100-252-07K	63D-11610-00 63D-11604-00 63D-11605-00 63D-11606-00 N/A
48 - 60 HP	2	STD 0.25MM 0.50MM 1MM	82MM 82.25MM 82.5MM 83MM	6H1-11631-03 6H1-11635-03 6H1-11636-03 100-265-07K	See Box Next Pg N/A See Box Next Pg N/A
60 - 70 HP 2 RING	3	STD 0.25MM 0.50MM 0.75MM 1MM	72MM 72.25MM 72.5MM 72.75MM 73MM	6H3-11631-00 6H3-11635-00 6H3-11636-00 N/A 6H3 PISTON	6K5-11601-02 6K5-11601-12 6K5-11601-22 N/A N/A

# SOUTHSIDE MARINE COMPONENTS

YAMAHA PISTON KITS			1MM = 40 Thou      .75MM = 30 Thou .50MM = 20 Thou    .25MM = 10 Thou		
Model	Cyl	Piston Size	Bore Size	Piston Kit	Piston Rings
60-70 HP 3 RING (RINGS ONLY) <b>CHECK MEASUREMENTS</b>	3	STD .50MM	72MM 72.5MM	N/A N/A	6H3-11610-00 6H3-11610-30
75 - 90 HP	3	STD 0.25MM 0.50MM 0.75MM 1MM	82MM 82.25MM 82.5MM 82.75MM 83MM	6H1-11631-00 6H1-11635-00 6H1-11636-00 100-265-06K 100-265-07K	See Box Below N/A See Box Below N/A N/A
115-225HP 90° V4 - V6 21mm Pin (Star) <b>6E5 CONROD</b>	V-4	STD 0.25MM	90MM 90.25MM	6G5-11631-00 6G5-11635-00	6E5-11610-02 N/A
	V-6	0.50MM 1MM	90.50MM 91MM	6G5-11636-00 6G5 STAR	6E5-11610-22 N/A
115-225HP 90° V4 - V6 21mm Pin (Port) <b>6E5 CONROD</b>	V-4	STD 0.25MM	90MM 90.25MM	6G5-11642-00 6G5-11645-00	6E5-11610-02 N/A
	V-6	0.50MM 1MM	90.50MM 91MM	6G5-11646-00 6G5 PORT	6E5-11610-22 N/A
115-225HP 90° V4 - V6 23mm Pin (Star) <b>6R5 CONROD</b>	V-4	STD 0.25MM	90MM 90.25MM	6R5-11631-00 6R5-11635-00	6R5-11603-00 6R5-11610-10
	V-6	0.50MM 1MM	90.50MM 91MM	6R5-11636-00 6R5 STAR	6R5-11605-00 N/A
115-225HP 90° V4 - V6 23mm Pin (Port) <b>6R5 CONROD</b>	V-4	STD 0.25MM	90MM 90.25MM	6R5-11642-00 6R5-11645-00	6R5-11603-00 6R5-11610-10
	V-6	0.50MM 1MM	90.50MM 91MM	6R5-11646-00 6R5 PORT	6R5-11605-00 N/A
225-250HP V6 76° EFI 2002-UP (Star) 6 IND.CARBYS	V6	STD .25MM .50MM	90MM 90.25MM 90.50MM	69L-11631-00 69L-11635-00 69L-11636-00	N/A N/A N/A
225-250HP V6 76° EFI 2002-UP (Port) 6 IND. CARBYS	V6	STD .25MM .50MM	90MM 90.25MM 90.50MM	69L-11642-00 69L-11645-00 69L-11646-00	N/A N/A N/A

ALL PISTON KITS COME WITH	1 X PISTON 1 X SET OF RINGS 1 X WRIST PIN 2 X CIRCLIPS	688-11603-A0      STD	1 x Squared
		688-11610-VP    .50MM	1 x Tapered
		688-11610-02      STD 688-11610-22    .50MM	2 x Tapered

## AVAILABLE SEPERATELY

PISTON/WRIST/GUDGEON PINS/WASHERS	634-11633-00, 648-11633-00, 663-11633-00, 676-11633-00, 689-11633-00, 6E5-11633-00, 6F5-11633-00, 6H3-11633-00, 6R5-11633-00, 6H4-11641-00
PISTON CIRCLIPS	688-11634-00, 6E5-11634-00, 6E7-11634-00, 6G0-11634-00, 6R5-11634-00



# SOUTHSIDE MARINE COMPONENTS



















YAMAHA SLEEVES – UNTIL SOLD						
MODEL	SLEEVE DESCRIPTION	CYLINDER I.D.	#	3/32" WALL O.D.	1/8" WALL O.D.	SLEEVE LENGTH
40 H.P. 3 CYLINDER 1983-04 50 H.P. 3 CYLINDER 1983-04 689cc (42.6C.I.)	Straight sleeve, with ports cut in.	2.637" 67MM	RS	LA-069-OB O.D.2.838"		5.240"
60 H.P. 3 CYLINDER 1992-04 70 H.P. 3 CYLINDER 1983- 04 849cc (51.8C.I.)	Straight sleeve, with ports cut in.	2.834" 72MM	RS		L-051-OB O.D.3.078"	5.556"
75 H.P. 3 CYLINDER 1994-00 85 H.P. 3 CYLINDER 1994-96 1140cc (69.6C.I.)	Straight sleeve, with ports cut in.	3.228" 82MM	RS	LA-071-OB O.D.3.443"		5.556"
90 H.P. 3 CYLINDER 1983-04 1140cc (69.6C.I.)	Straight sleeve, with ports cut in.	3.228" 82MM	RS	LA-071-OB O.D.3.443"		5.556"
115 H.P. V-4 1983-88 130 H.P. V-4 1983-88 1730cc (105.5C.I.)	Straight sleeve, with ports cut in.	3.543" 90MM	RS	LA-032-OB O.D. 3.748"		5.163"
115 H.P. V-4 (#6E5) 1989-04 1730cc (105.5C.I.)	Straight sleeve, with ports cut in, compression relief notch at top of exhaust port.	3.543" 90MM	RS	LA-086-OB O.D. 3.748"		5.163"
130 H.P. V-4 (#6L1) 1989-00 1730cc (105.5C.I.)	Straight sleeve, with ports cut in, compression relief notch at top of exhaust port.	3.543" 90MM	RS	LA-087-OB O.D. 3.748"		5.163"
150 H.P. V-6 1983-88 175 H.P. V-6 1983-87 200 H.P. V-6 1983-87 2596cc (158.4 C.I.)	Straight sleeve, with ports cut in.	3.543" 90MM	RS	LA-033-OB O.D. 3.748"		5.163"
150 H.P. 90 V-6 (#6R3) 1993-04 2596cc (158.4.C.I.)	Straight sleeve, with ports cut in, compression relief notch at top of exhaust port.	3.543" 90MM	RS	LA-147-OB O.D. 3.787"		5.163"
200 H.P. V-6 (#6G5) 1988-89 2596cc (158.4 C.I.)	Straight sleeve, with ports cut in, no exhaust port compression relief notch	3.543" 90MM	RS	LA-088-OB O.D. 3.748		5.163"
175 H.P. 90 V-6 (#6R3) 1990-00 200 H.P. 90 V-6 (#6R3) 1990-04 2596cc (158.4C.I.)	Straight sleeve, with ports cut in, no exhaust port compression relief notch	3.543" 90MM	RS	LA-089-OB O.D. 3.787"		5.163"
# RS = Replacement Sleeve						



**Always wait until sleeve arrives before commencing any machine work. Never assume that the stated model & year of the cylinder are correct. Always check if sleeve ports match cylinder ports.**

**Note: Victory Parts Australia will not be responsible for any applications.**

# SOUTHSIDE MARINE COMPONENTS

 <p>Wrist Pin Bearing 9.9 - 15 HP <b>Part No: 93602-14104</b></p>	 <p>Wrist Pin Bearing 20 - 50 HP <b>Part No: 93602-20M02</b></p>	 <p>Wrist Pin Bearing 20 - 25 HP 2 Cyl 2 Carby <b>Part No: 93602-18M12</b></p>	 <p>Wrist Pin Bearing 60 - 70 HP <b>Part No: 93603-18M09</b></p>
 <p>Wrist Pin Bearing 40, 50, 55 &amp; 60 HP 2 Cyl V4 / V6 &amp; 90 HP 3 Cyl <b>Part No: 93603-21111</b></p>	 <p>Wrist Pin Bearing For a 6R5 Conrod Large Pin 23mm 93 and Later V4/V6 90° <b>Part No: 93310-323V6</b></p>	 <p>Plate Washer <b>Part No: 90201-23M01</b></p>	 <p>Wrist Pin Bearing 76° 225 / 250 HP <b>Part No: 93310-326V4</b></p>
 <p>Centre Main Bearing 60-70 HP <b>Part No: 93306-306V2</b></p>	 <p>Centre Main Bearing 3 Cyl 75 / 85 / 95 HP <b>Part No: 93310-835U8</b></p>	 <p>Centre Main Bearing V4 / V6 90° <b>Part No: 93310-954U1</b></p>	
 <p>Centre Main Bearing 76° 225 / 250 HP <b>Part No: 93310-959U0</b></p>	 <p>Upper Main Bearing 40-50 HP <b>Part No: 93306-305U8</b></p>	 <p>Upper Main Bearing 3 Cyl 60-70 HP <b>Part No: 93311-636U6</b></p>	 <p>Upper Main Bearing 3 Cyl 75 / 85 / 95 HP <b>Part No: 93310-636U4</b></p>
 <p>Upper Main Bearing V4 / V6 90° <b>Part No: 93311-940U3</b></p>	 <p>Upper Main Bearing 225-300 HP V6 76° <b>Part No: 93311-940V0</b></p>	 <p>Upper Main Bearing 225-300 HP V6 76° <b>Part No: 93306-209U1</b></p>	

# SOUTHSIDE MARINE COMPONENTS

 <p>Lower Main Bearing 40-50 HP <b>Part No: 93306-305U8</b></p>	 <p>Lower Main Bearing 60 / 70 HP <b>Part No: 93306-306V1</b></p>	 <p>Lower Main Bearing 85-90 HP 3 Cyl <b>Part No: 93306-206U5</b></p>	
 <p>Lower Main Bearing V4 / V6 90° Replaces: 30-31265 <b>Part No: 93306-208U0</b></p>	 <p>Big End Bearing 9.9 / 15 HP <b>Part No: 93310-620V5</b></p>	 <p>Big End Bearing 25 HP <b>Part No: 93310-522A4</b></p>	
 <p>Big End Bearing 25/30 HP <b>Part No: 93310-624U5</b></p>	 <p>Big End Bearing 40 HP 2 Cyl <b>Part No: 93310-727V7</b></p>	 <p>Big End Bearing 60/70 <b>Part No: 93310-527W1</b></p>	
 <p>Big End Bearing 40, 55, 90 HP 3 Cyl <b>Part No: 93310-730V8</b></p>	 <p>Big End Bearing V4-V6 90° <b>Part No: 93310-836V2</b></p>	 <p>Big End Bearing 250 HP V6 76° <b>Part No: 93310-840U1</b></p>	 <p>Labyrinth Seal <b>Part no: 6H3-11515-00</b></p>
<b>CRANKSHAFT PINS</b>		662-11681-00, 682-11681-00, 689-11681-01, 6F5-11681-00, 6K5-11681-00	

Refer to this illustration for assistance in determining the correct crankshaft for your application



# SOUTHSIDE MARINE COMPONENTS



**CHECK AVAILABILITY**

New Crank  
40-50 HP 3 Cyl  
**Part No 6H4-11400-00**



**CHECK AVAILABILITY**

New Crank  
60-70 HP 3 Cyl  
**Part No: 6H3-11400-00**



**CHECK AVAILABILITY**

New Crank  
85 – 90 HP 3 Cyl  
**Part No: 688-11411-01**



**CHECK AVAILABILITY**

New Crank  
90° V4 1984-89, 1996-Up  
Small Taper  
**Part No: 6E5-11411-00**

New Crank  
90° V4 1990-95  
Large Taper  
**Part No: 6N7-11411-00**



**CHECK AVAILABILITY**

New Crank  
90 ° V6 Small Taper  
**Part No: 6G5-11411-02**

New Crank  
90° V6 Large Taper  
**Part No: 6R3-11411-09**



Rod Bolts  
V4 / V6 90°  
C40 2 Cyl 91-97,  
C55 91-95,  
3 Cyl 85-90  
**Part No:**  
**90109-08462**



Rod Bolt  
225-250 HP  
V6 76°  
**Part No:**  
**90109-09001**



Stainless  
Powerhead Bolt Kit  
Fits V4 & V6 90°  
**Part No:**  
**355**



Flywheel Key

V4 / V6 90°  
Replaces:  
90280-05015  
**Part No:**  
**90280-05049**



Timing Belt  
Replaces:  
57-804145  
**Part No:**  
**67F-46241-00**

# SOUTHSIDE MARINE COMPONENTS



Conrod  
All 2 Stroke  
9.9-15 HP 1996-97  
**Part No: 650-11651-04**



Conrod  
E15 Models Only  
**Part No: 662-11651-02**



Conrod  
E25 88-90  
**Part No: 6G0-11651-00**



Thrust Washer: **90209-24M03**

Conrod  
2 Cyl 20-30 HP  
**Part No: 689-11651-00**



Conrod  
40-50 HP 3 Cyl  
**Part No: 6H4-11650-00**



Conrod  
60-70 HP 3 Cyl  
Replaces: 6K5-11650-00  
**Part No: 6H3-11651-00**



Conrod  
C40 2 Cyl, 55 HP 2 Cyl  
75-90 HP 3 Cyl  
**Part No: 688-11650-03**



Conrod  
V4-V6  
23mm Wrist Pin  
**Part No: 6R5-11650-10**



Conrod  
84-92 V4-V6  
21.5mm Wrist Pin  
**Part No: 6E5-11650-01**



# SOUTHSIDE MARINE COMPONENTS


YAMAHA MOTOR SEAL KITS		
HP	Year	Part Number
9.9 - 15 HP 2 Stroke		682 Motor Seal Kit
25-30 HP 2 Stroke	Some Variations	<b>Phone for correct seals</b>
30HP 2 Stroke 3 Cyl		6J8 Motor Seal Kit
45-50HP 2 Stroke 3 Cyl	1984 - Current	6H4 Motor Seal Kit
60-70HP 2 Stroke 3 Cyl	1984 - Current	6H3 Motor Seal Kit
75, 80, 85, 90HP 2 Stroke 3 Cyl	1984 - Current	688 Motor Seal Kit
V4 & V6	1984 - Current	6E5-6G5 Seal Kit
225-250HP 76°	1992 - Current	1778




Seal Kit  
9.9-15 HP 2 Cyl 2 Stroke  
**Part No: 682 Motor Seal Kit**




Seal Kit  
30 HP 3 Cyl 2 Stroke  
**Part No: 6J8 Motor Seal Kit**



Seal Kit  
40-50 HP 3 Cyl 2 Stroke  
**Part No: 6H4 Motor Seal Kit**



Seal Kit  
60-70 HP 3 Cyl 2 Stroke  
**Part No: 6H3 Motor Seal Kit**



Seal Kit  
75-90 HP 3 Cyl  
**Part No: 688 Motor Seal Kit**



Seal Kit  
90° V4/V6  
**Part No: 6E5-6G5 Seal Kit**



Seal Kit  
225-250 HP 76 ° V6  
**Part No: Part No: 1778**



Crank Seal Ring  
V4, V6  
**Part No: 6E5-11447-00**

# SOUTHSIDE MARINE COMPONENTS



Contact Point  
8-15, 28 HP  
**Part No: 650-81321-10**



Condenser  
8-15, 28 HP  
**Part No: 647-81325-11**


Description	Part No.	Alternate Part No.	Interchangeable
Starter Relay Assembly	6G1-81941-10	68N-81940-00	Yes – One way

A new, more durable starter relay is being used on many models. If replacing an old 6G1- Style starter relay during a repair use the new 68N- style part. Do NOT use the old style starter relay on any models originally equipped with a 68N- Style relay.

OLD



NEW



Starter Relay  
Replaces: 68V-8194A-00  
**Part No: 68N-81940-00**




Starter Relay  
Various 2 Stroke 9.9-90HP  
Various 4 Stroke 9.9, 40-60HP  
Replaces: 89-825096T  
**Part No: 6G1-81941-10**



Starter Relay  
Various 60-70HP 89-Up  
Various 80-90HP 89-91  
**Part No: 688-81950-10**



Starter Relay  
Various 115-250HP 94-Up  
**Part No: 61A-81941-00**

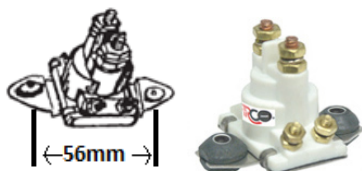

Starter Relay  
Various  
4 stroke 25-40 hp  
Replaces: 65W-81941-00,  
89-850187T1  
**Part No: 89-818997T1**



Starter Solenoid  
4 STROKE F115AET 2000-2012  
Replaces: 68V-81941-01  
**Part No: SW486**



Brush Holding Tool  
Fits: Most American Made  
Permanent  
Magnet Outboard Starters  
**Part No: SR107**

# SOUTHSIDE MARINE COMPONENTS

**Refer to Electrical Guide Table for Ignition Coil Applications...**



Ignition Coil  
**Part No: 6E5-85570-10**



Ignition Coil  
**Part No: 6E7-85570-19**



Ignition Coil  
**Part No: 6R3-85570-01**



Ignition Switch  
Control Box 4-Stroke  
**Part No: 703-82510-12**



Ignition Switch  
Control Box 2-Stroke  
**Part No: 703-82510-43**



Dielectric Grease  
5 oz / 148mm  
**Part No: 991-9706**



Lanyard Kit  
**Part No: VP7190**



Universal Stop Switch  
**Part No: 6A0-82550-01**



Stop Switch Cap  
**Part No: 689-8257Y-00**



Universal Emergency  
Cut out Switch  
**Part No: VP50530**



8 Foot Battery Lead  
(Black)  
**Part No: 941-0608B**  
8 Foot Battery Lead  
(Red)  
**Part No: 941-0608R**



Battery  
Isolator Switch  
4 POSITION  
**Part No: VP23122**



Battery Isolator Switch  
**Part No: VP53087**



Spark Plug Boot Kit  
**Part No: 663-82370-01**



Spark Plug Wire  
Sold Per Metre  
**Part No: 510883**



# SOUTHSIDE MARINE COMPONENTS

YAMAHA STARTER MOTOR APPLICATION GUIDE					
MODEL	YEAR	REPLACES	NOTES	STARTER MOTOR PART NO:	BENDIX/ BRUSH HOLDER
20, 25 6, 8, 9.9, 15	1989-13 1984-99	3421, 6L2-81800-11, 6L2-81800-20, 682-81800-11, 682-81800-12,S106-07B/E/ F, S106-12 A/B, 350-76010-0	10 Tooth drive gear	6L2-81800-10	N/A
F8 F9.9 FT8 FT9.9 25 30, 40, 50	2001-10 1989-12 2001-05 2001-13 1999 1989-13	3423, 6F5-81800-10, 6J4-81800-00, 6J4-81800-01, 68T-81800-00, 6G8-81800-11, S108-87A, S108-123	11 Tooth drive gear	6F5-81800-11	DV523
25 30 40	1989-98 1996-13 1993-98	3420, 689-81800-11, 689-81800-12	11 Tooth drive gear	689-81800-13	DV520
F25	1998-09	5364, 65W-81800-00, 65W-81800-01, 65W-81800-02, 65W-81800-03	9 Tooth drive gear	5364	DV364
F30 F40	2001-09 2000-09	5365, 67C-81800-00, 67C-81800-01, 67C-81800-02	9 Tooth drive gear	5365	DV365 SR365
40, 50	1984-88	3425, 6H4-81800-10, 6H4-81800-12, S108-99A, S108-99B	9 Tooth drive gear	6H4-81800-11	DV525 SR425
60, 70	1989-13	3422, 6H3-81800-11, S108-97A	9 Tooth drive gear	6H3-81800-10	DV522 SR422
55	1995-00	3424, 676-81800-10, 697-81800-11, 697-81800-12, 697-81800-13, 99999-03249, S114-221, S114-221E, S114-221F, S114-221G	9 Tooth drive gear	697-81800-10	SR427
F50, F60, F80, F100 FT50 FT60 F70 F115, FL115	2005-13 2005-07 2005-10 2011-13 2000-13	3432, 6CJ-81800-00, 6C5-81800-00, 68V-81800-00, 68V-81800-02, S114-838A S114-838B	13 Tooth drive gear	68V-81800-01	N/A
75 85 80 90	1995-06 1993-06 1989-96 1989-13	3427, 688-81800-10, 688-81800-11	9 Tooth drive gear	688-81800-12	DV527 SR427
F100 F80	1999-06 1999-07	3430, 67F-81800-00, 67F-81800-02, 67F-81800-03, S114-828B, S114-828C	13 Tooth drive gear	67F-81800-01	N/A

# SOUTHSIDE MARINE COMPONENTS

## YAMAHA STARTER MOTOR APPLICATION GUIDE

MODEL	YEAR	REPLACES	NOTES	STARTER MOTOR PART NO:	BENDIX/ BRUSH HOLDER
115, 140 150, 175, 200 F40 F50 FT50	1989-96 1989-96 1999 1995-02 2001-02	3426, 6E5-81800-11, S114-323	9 Tooth drive gear	6E5-81800-12	DV526  SR426
115, 150 130, 175, 200	1997-13 2000-13	3428, 6K7-81800-10, 6N7-81800-00, 6N7-81800-01, 6N7-W5818-01, 61H-81800-00, 61H-81800-01, 61H-81800-10, 99999-03938	9 Tooth drive gear	6N7-81800-10	DV528  SR428
F150, FL150 F200, FL200 F250, FL250	2004-13 2012-13 2006-11	3433, 6BR-81800-00, 6BR-81800-01, S114-867, S114-867A, S114-867B	13 Tooth drive gear	63P-81800-00	N/A
LZ150 LZ200 Z150, Z175, Z200	2003-07 2002-10 2002-13	3431, 68F-81800-01, 68F-81800-03	13 Tooth drive gear	68F-81800-00	N/A
225 250 F50, FT50, FT60 F60	1996-06 1990-03 2003-06 2002-06	3429, 61A-81800-01, 69L-81800-00, 69W-81800-01	9 Tooth drive gear	61A-81800-00	DV529 SR428



Starter Motor  
Part No: 689-81800-13



Starter Motor  
Part No: 6L2-81800-10



Starter Motor  
Part No: 6H3-81800-10



Starter Motor  
Part No: 6F5-81800-11



Starter Motor  
Part No: 697-81800-10



Starter Motor  
Part No: 6H4-81800-11

# SOUTHSIDE MARINE COMPONENTS



Starter Motor  
Part No: 6E5-81800-12



Starter Motor  
Part No: 688-81800-12



Starter Motor  
Part No: 6N7-81800-10



Starter Motor  
Part No: 61A-81800-00



Starter Motor  
Part No: 67F-81800-01



Starter Motor  
Part No: 68F-81800-00



Starter Motor  
Part No: 5364



Starter Motor  
Part No: 5365



Starter Motor  
Part No: 68V-81800-01



Starter Motor  
Part No: 63P-81800-00

## YAMAHA TRIM MOTOR APPLICATION GUIDE

MODEL	YEAR	REPLACES	TRIM MOTOR PART NO:
30, 40, F25 F30, F40, FT25	1998-13 2001-13	65W-43880-01, 67C-43880-00, 67C-43880-01	65W-43880-00
40, 50	1985-98	6264, 6H5-43880-09	6H5-43880-02
40, 50 F50, FT50 F60 F70 FT60	2001-13 2001-06 2002-06 2011-13 2003-07	6259, 62Y-43880-01, 62Y-43880-02, CS3-43880-00, 69W-43880-09	62Y-43880-00
50, 60, 70	1989-91	6267, 6E5-43880-01, 6E5-43880-02, 688-43880-10	6H1-43800-00
40, 50 55 60, 70, 90 75 80 85	1992-94 1995-00 1992-13 1995-06 1992-96 1993-06	6260	6H1-43880-02
40, 50 F40, F50 FT50	1995-01 1995-00 1999	6266, 62X-43880-01, 62X-43880-09	62X-43880-00
F50, F60, FT60 FT50	2005-15 2005-07	6C5-43880-01	6C5-43880-00

# SOUTHSIDE MARINE COMPONENTS

## YAMAHA TRIM MOTOR APPLICATION GUIDE

MODEL	YEAR	REPLACES	TRIM MOTOR PART NO:
F80, F100	2005-13	6258, 6D8-43880-00, 6D8-43880-09	6D8-43880-01
F100, F80	1999-06	6261	67F-43880-00
115, 140, 150, 175, 200, 225	1989-96	6265, 6G5-43880-00, 6G5-43880-01	6G5-43880-02
225 250	1996-06 1990-03	61A-43880-01	61A-43880-02
115, 130, 150, 175, 200 F100 F115, FL115 F150, FL150 F175 F200, F225, F250 LZ150 LZ200 Z150, Z175, Z200 Z250, Z300	1997-13 2002-04 2000-13 2004-11 2014 2012-13 2002-07 2002-10 2002-13 2004-07	6240, 64E-43880-00, 64E-43880-03, 64E-43880-04, 67H-43880-00, 67H-43880-01, 67H-43880-04 68V-43880-00, 68V-43880-01, 68V-43880-03	64E-43880-01
F200, F225, FL200, FL225 F250, FL250 F300, FL300 LZ250, LZ300, Z250, Z300	2002-13 2007-13 2011-13 2003-07	6263, 69J-43880-01	69J-43880-00



Trim Motor  
4 Bolt 2 Wire (41mm Shaft)  
**Part No: 6H5-43880-02**



Trim Motor  
3 Bolt 2 Wire (37mm Shaft)  
**Part No: 62Y-43880-00**



Trim Motor  
4 Bolt 2 Wire (25mm Shaft)  
**Part No: 67F-43880-00**



Trim Motor  
3 Bolt 2 Wire (7mm Shaft)  
**Part No: 62X-43880-00**



Trim Motor  
3 Bolt 3 Wire  
**Part No: 6H1-43800-00**



Trim Motor  
3 Bolt 2 Wire  
**Part No: 6H1-43880-02**

# SOUTHSIDE MARINE COMPONENTS



Trim Motor  
3 Bolt 2 Wire  
**Part No: 69J-43880-00**



Trim Motor 3 Bolt 2 Wire  
**Part No: 6G5-43880-02**



Trim Motor  
4 Bolt 2 Wire  
**Part No: 65W-43880-00**



Trim Motor  
3 Bolt 2 Wire (30mm Shaft)  
**Part No: 6C5-43880-00**



Trim Motor  
3 Bolt 4 Wire  
**Part No: 61A-43880-02**



Trim Motor  
4 Bolt 2 Wire  
**Part No: 64E-43880-01**



Trim Switch Adj Kit  
Replaces: 99999-03830  
**Part No: 64E-43139-10**



Trim Motor  
4 Bolt, 2 Wire  
**LONG SHAFT OR ROUNDED END SHORT SHAFT**  
**Part No: 6D8-43880-01**

16mm SHORT SHAFT

INCLUDES  
41mm COUPLER LENGTH LONG SHAFT



**TRIM** Cap Dust Seal  
**Part No: 6H1-43822-10**













**TILT** Cap Dust Seal  
**Part No: 6H1-43812-00**

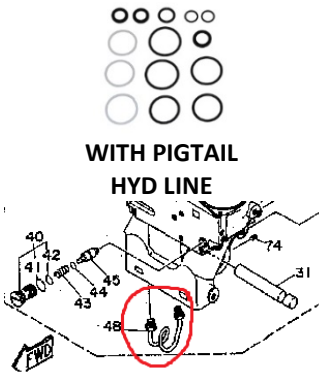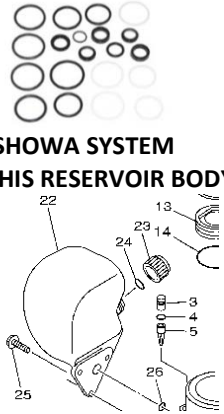

Trim & Tilt Switch Assy  
**Part No: 703-82563-02**



# SOUTHSIDE MARINE COMPONENTS

 <p><b>WITH PIGTAIL HYD LINE</b></p> <p>Trim &amp; Tilt Seal Kit 2 Stroke only 115-225HP 86-96 Pigtail Hyd Line on Tilt Cyl <b>Part No: 115225</b></p>	 <p><b>SHOWA SYSTEM HAS THIS RESERVOIR BODY</b></p> <p>Trim &amp; Tilt Seal Kit 2 &amp; 4 Stroke Various Motors 115-225HP 97-Up Showa (Fast Strike) <b>Part No: 115225FS</b></p>	<p><b>TILT</b> Cap W/Seals</p>  <p>115-130 HP 1997-07 150-200 HP 1997-07 250-300 HP 2004-UP</p> <p>Replaces: 63P-43810-00, 63P-43810-09, 64E-43810-00, 64E-43810-09, 64E-43811-01, 64E-43811-02 <b>Part No: 63P438</b></p>	<p><b>TRIM</b> Cyl Cap W/Seals</p>  <p>115-300 HP 1997-06</p> <p>Replaces: 64E-43821-00, 64E-43821-09 <b>Part No: 64E-43821-00</b></p>
 <p>Fits 3 Wire T+T</p> <p>Trim Motor Relay Fits 3 Wire T + T <b>Part No: 688-81950-10</b></p>	 <p>Universal T/T Switch Dash Mounted <b>Part No: 174652</b></p>	 <p>Wiring Harness Converts 2-Wire trim motors for use on older 3 wire systems <b>Part No: 8268</b></p>	
 <p>Fits 2 Wire T + T</p> <p>Trim Motor Relay <b>UP</b> 1991-Up 115 HP 1991-04 130 HP 1991-Up 150 HP 1991-00 175 HP 1991-99 200 HP <b>Part No: 6E5-81950-01</b></p>	 <p>Fits 2 Wire T + T</p> <p>Trim Motor Relay <b>DOWN</b> 1991-Up 115 HP 1991-04 130 HP 1991-Up 150 HP 1991-00 175HP 1991-99 200HP <b>Part No: 6E5-8195A-01</b></p>	 <p>3 Pin Plug Relay Assy <b>Part No: 61A-81950-01</b></p> <p>To order 3 Pin Plug Relay Assy with bullet terminals <b>Part No: 6H1-81950-00</b>, you can order 3 Pin Plug Assy 61A-81950-01 &amp; replace plug with bullet terminals.</p> <p>To order 2 wire rectangle plug <b>Part No: 68V-8195B-01</b>, you can order 3 Pin Plug Assy 61A-81950-01 &amp; adapt to suit.</p> <p>Note: These options will void warranty.</p>	

# SOUTHSIDE MARINE COMPONENTS

## Yamaha Electrical Guide

HP	Year	St	Model	Cyl	Ign. Pack	Stator	Rectifier	Ign. Coil
4 & 5	84-01	2		1	6E0-85540-70	N/A	676-81970-00	N/A
6	84-99	2		2	696-85540-10	N/A	676-81970-00	N/A
8	84-04	2		2	696-85540-10	N/A	676-81970-00	N/A
9.9	84-95	2	EL,ES,LH,LJ,LK,LN,SH,SJ,SK,SN	2	695-85540-10	N/A	676-81970-00	N/A
9.9	89-90	2	D	2	695-85540-10	N/A	N/A	6E7-85570-19
9.9	93-95	2	D	2	695-85540-10	N/A	N/A	6E7-85570-19
15	84-95	2	EL,ES,LH,LJ,LK,LN,SH,SJ,SK,SN	2	695-85540-10	N/A	676-81970-00	N/A
15	89-90	2	D	2	695-85540-10	N/A	N/A	6E7-85570-19
15	93-95	2	D	2	695-85540-10	N/A	N/A	6E7-85570-19
15	1996	2	MHV	2	695-85540-10	N/A	N/A	6E7-85570-19
20	93-94	2	CM	2	695-85540-10	N/A	676-81970-00	6E7-85570-19
20	94-05	2	EL,ES,ML,MS	2	N/A	N/A	676-81970-00	N/A
25	84-87	2	EL,ES,LH,SH	2	689-85540-21	N/A	676-81970-00	N/A
25	88-93	2	EL,ES,LD,LF,LG,ML,MS,SD,SF,SG	2	N/A	N/A	676-81970-00	N/A
25	89-90	2	D	2	695-85540-10	N/A	676-81970-00	6E7-85570-19
25	90	2	CV25,EL,EM	2	695-85540-10	N/A	676-81970-00	6E7-85570-19
25	91-97	2	C25,EL,ES,ML,MS	2	695-85540-10	N/A	676-81970-00	6E7-85570-19
25	96-98	2	C25 MHU, VM	2	N/A	N/A	N/A	N/A
25	94-05	2	EL,ES,ML,MS	2	N/A	N/A	676-81970-00	N/A
25	98-09	4	EH,ER,TH	2	N/A	N/A	815279T	N/A
25	98-09	4	F25,MH	2	N/A	N/A	815279T	N/A
30	84-87	2	EL,ES,LH,SH	2	689-85540-21	N/A	676-81970-00	N/A
30	89-90	2	CV30,EL	2	689-85540-21	N/A	676-81970-00	N/A
30	91-97	2	C30,EL	2	N/A	N/A	676-81970-00	N/A
30	03-05	4	F30	2	N/A	N/A	815279T	N/A
40	84-88	2	ALL	3	6H4-85540-21	N/A	676-81970-00	N/A
40	89-94	2		3	N/A	N/A	676-81970-00	N/A
40	90	2	CV40	2	689-85540-21	N/A	676-81970-00	N/A
40	Up to 95	2	Manual Start	3	N/A	N/A	676-81970-00	N/A
40	Up to 95	2	Electrical Start	3	N/A	N/A	N/A	N/A
40	95-12	2	Manual Start	3	63D-85540-00	N/A	676-81970-00	N/A
40	95-12	2	Start	3	63D-85540-00	N/A	N/A	N/A
40	99	4	AE,EH,ER,TR	4	N/A	N/A	N/A	6E7-85570-19
48	95-00	2	E48	2	696-85540-10	N/A	676-81970-00	N/A
50	84-88	2	ALL	2	6H4-85540-21	N/A	676-81970-00	N/A
50	89-94	2		3	N/A	N/A	676-81970-00	N/A
50	95-06	4	AE,BE,TH,TR, CE	4	N/A	N/A	N/A	6E7-85570-19
50	Up to 95	2	Manual Start	3	N/A	N/A	676-81970-00	N/A
50	Up to 95	2	Electric Start	3	N/A	N/A	N/A	N/A
50	95-12	2	Manual Start	3	63D-85540-00	N/A	676-81970-00	N/A
50	95-12	2	Start	3	63D-85540-00	N/A	N/A	N/A
50		4	FT, FE, HE, FT50	4	N/A	N/A	68V-81960-00	N/A
55	89	2	CV55	2	663-85540-15	N/A	676-81970-00	N/A
55	91-94	2	C60	2	663-85540-15	N/A	676-81970-00	N/A
60	99	2	E60	3	N/A	N/A	676-81970-00	N/A

# SOUTHSIDE MARINE COMPONENTS

## Yamaha Electrical Guide

HP	Year	St	Model	Cyl	Ign. Pack	Stator	Rectifier	Ign. Coil
60	02-07	4	AE,BE	4	N/A	N/A	N/A	6E7-85570-19
60		4	FT, CE, FE, FT60	4	N/A	N/A	68V-81960-00	N/A
70	84-91	2	ET,TLN	3	N/A	N/A	676-81970-00	N/A
70		4	AE	4	N/A	N/A	68V-81960-00	N/A
75	88-96	2	E75	3	688-85540-12	688-85510-11	6G5-81960-A0	N/A
75	97-00	2	E75	3	688-85540-12	688-85510-11	N/A	N/A
80	00-07	4	AET	4	N/A	N/A	67F-81960-12	N/A
80		4	BE	4	N/A	N/A	68V-81960-00	N/A
85	89-90	2	CV85	3	688-85540-12	688-85510-11	6G5-81960-A0	N/A
85	91-96	2	C85	3	688-85540-12	688-85510-11	6G5-81960-A0	N/A
90	84-87	2	ET	3	688-85540-12	688-85510-11	6G5-81960-A0	N/A
90	88-91	2	ET	3	688-85540-12	688-85510-11	6G5-81960-A0	N/A
100	01-06	4	AET	4	N/A	N/A	67F-81960-12	N/A
100	02-04	4	BET	4	N/A	N/A	67F-81960-12	N/A
100	05-06	4	DE	4	N/A	N/A	68V-81960-00	N/A
115	84-89	2	ET	4	6E5-85540-12	6G5-85510-10	N/A	6E5-85570-10
115	90-03	2	ET,TJ,TL	4	N/A	N/A	N/A	6R3-85570-01
115		4	AE, FL115	4	N/A	N/A	68V-81960-00	N/A
115	04-05	2	ET,TJ,TL	4	N/A	N/A	N/A	6R3-85570-01
115	91-96	2	C115	4	6E5-85540-12	6G5-85510-10	6G5-81960-A0	6E5-85570-10
115	97-98	2	C115	4	6E5-85540-12	6G5-85510-10	N/A	6E5-85570-10
115	98-99	2	B115,S115	4	N/A	N/A	N/A	6R3-85570-01
130	88-89	2	ET	4	6E5-85540-12	6G5-85510-10	6G5-81960-A0	6E5-85570-10
130	90-03	2	ET,TJ,TL	4	N/A	N/A	N/A	6R3-85570-01
150	84-89	2		6	6G5-85540-12	6G5-85510-10	6G5-81960-A0	6E5-85570-10
150	90-99	2		6	N/A	N/A	N/A	6R3-85570-01
150	97	2		6	N/A	N/A	6G5-81960-A0	6R3-85570-01
150	98-05	2		6	N/A	N/A	N/A	6R3-85570-01
175	84-89	2		6	6G5-85540-12	6G5-85510-10	6G5-81960-A0	6E5-85570-10
175	90-05	2		6	N/A	N/A	N/A	6R3-85570-01
200	84-89	2	ET	6	6G5-85540-12	6G5-85510-10	6G5-81960-A0	6E5-85570-10
200	90-01	2		6	N/A	N/A	N/A	6R3-85570-01
225	84-89	2	EXCELL	6	6G5-85540-12	6G5-85510-10	6G5-81960-A0	N/A

**HEAT SINK COMPOUND:** TYPE 29 WILL NOT HARDEN OR DRY OUT. RECOMMENDED FOR USE WHEN MOUNTING RECTIFIERS AND REGULATORS ON CHRYSLER, FORCE, MARINER, MERCURY, NISSAN, SUZUKI, TOHATSU AND YAMAHA ENGINES

**Part No: 989-8109**




















**BULLET CONNECTORS**  
10 Male, 10 Female with Shields

**Part No: 911-9783**



# SOUTHSIDE MARINE COMPONENTS


 <p>Ignition Pack Part No: 6E0-85540-70</p>	 <p>Hitachi Ignition Part No: 696-85540-10</p>	 <p>Ignition Pack Part No: 695-85540-10</p>	 <p>Ignition Pack Part No: 689-85540-21</p>
 <p>Hitachi Ignition Part No: 663-85540-15</p>	 <p>Ignition Pack Part No: 688-85540-12</p>	 <p>Ignition Pack Part No: 6H4-85540-21</p>	 <p>Ignition Pack Part No: 63D-85540-00</p>
 <p>Ignition Pack Part No: 6E5-85540-12</p>	 <p>Ignition Pack Part No: 6G5-85540-12</p>	 <p>Stator 3 Cyl Part No: 688-85510-11</p>	 <p>Stator 4 Cyl Replaces: 6E5-85510-11 Part No: 6G5-85510-10</p>
 <p>Stator 6 Cyl 20 Amp Part No: 6G5-85510-10</p>	 <p><b>Universal 3 Wire Reg/Rect</b> Fits Various Motors 6-300hp Wires: Green, Green/White, Red, Black(Earth) All approx. 150mm long Unit approx. 40 x 35mm 1 Centre Mount Hole Part No: 6F5-81970-62</p>	 <p><b>Universal Reg/Rect Kit</b> For use on Outboards with under flywheel lighting coil Instructions Included Part No: RR007CK</p>	 <p>Rectifier Part No: 676-81970-00</p>
 <p>Rectifier Replaces: 6D3-81960-00 Part No: 68V-81960-00</p>	 <p>Rectifier Part No: 6G5-81960-A0</p>	 <p>Rectifier Replaces: 65W-81960-00 Part No: 815279T</p>	 <p>Reg/ Rect Part No: 67F-81960-12</p>

**Refer to Yamaha Electrical Guide Table for Applications**

# SOUTHSIDE MARINE COMPONENTS

YAMAHA GASKET SET					
Year	Cyl	Stroke	Model	G / Set	Head / G
1984 - 1996	2	2 Stroke	6 / 8	6G1-W0001-A2	6G1-11193-A1
1984 - 1997	2	2 Stroke	9.9 / 15	682-W0001-03	682-11181-00
97 - Current	2	2 Stroke	9.9 / 15	63V-W0001-00	63V-11181-A0
1989 - 2002	2	4 Stroke	9.9	6G8-W0001-A3	27-825482-1
2002 - Current	2	4 Stroke	9.9 / 15	66M-W0001-01	66M-11181-10
1979 - 1984 67mm Bore	2	2 Stroke	20 / 25	6G0-W0001-00	N/A
1980 - 1987	2	2 Stroke	20 / 25 / 30	695-W0001-00	695-11181-A0
1984 - 1992	2	2 Stroke	20 / 25 / 30	689-W0001-02	689-11181-00
1984 - Current (2 Carby)	2	2 Stroke	20 / 25	6L2-W0001-00	6L2-11181-A1
1993 - Current (1 Carby)	2	2 Stroke	25 / 30	61N-W0001-02	61N-11181-A0
1998 - Current	2	4 Stroke	25	65W-W0001-00	N/A
1993 – 1998	2	2 Stroke	40CV	6R6-W0001-00	676-11181-03
2000 - Current	3	4 Stroke	30 / 40	67C-W0001-00	N/A
1989 - Current	3	2 Stroke	30	6J8-W0001-00	6J8-11181-00
40D (1981) 40A 40B (1978)	2	2 Stroke	40D / 40A / 40B	6A0-W0001-01	676-11181-03
1989 - 1997	2	2 Stroke	E40	6F6-W0001-02	6F5-11181-00
1998 - Current	2	2 Stroke	40	66T-W0001-01	66T-11181-A2
1984 - 1994	3	2 Stroke	40 / 50	6H4-W0001-02	6H4-11181-00
1994 - Current	3	2 Stroke	40 / 50	63D-W0001-02	6H4-11181-00
1984 - 1994	2	2 Stroke	48 / 55 / 60	697-W0001-02 UNTIL SOLD THEN NLA	697-11181-00
1984 - Current	3	2 Stroke	60 / 70	6H3-W0001-02	6H3-11181-01
1984 - Current	3	2 Stroke	75 / 80 / 90	688-W0001-02	688-11181-01
1984 - Current	4	2 Stroke	115 / 130 / 140	6E5-W0001-A2	6E5-11181-A1
1999-2007 (Different Manifold Gasket to 68V-W0001-03 Kit)	4	4 Stroke	80 / 100 (A, AET)	67F-W0001-03	67F-11181-02
2005-2013 (Different Manifold Gasket to 68V-W0001-03 Kit)	4	4 Stroke	80 BET / 100 (DET)	67F-W0001-03	67F-11181-02
2000 - Current	4	4 Stroke	75/ 80 / 90 / 100 / 115	68V-W0001-03	67F-11181-02
1984 - UP (Vertical Reeds)	6	2 Stroke	150 / 175 / 200 / 225	6G5-W0001-02	6G5-11181-A1
1995 - UP (Horizontal Reeds) 90°	6	2 Stroke	150 / 175 / 200	500-347	6G5-11181-A1
2002 - Current (HPDI) 2.6L	6	2 Stroke	150 / 175 / 200	68F-W0001-01	N/A
1997 - Current (Carby)	6	2 Stroke	225 / 250	61A-W0001-00	61A-11181-00
1998 - Current (EFI)	6	2 Stroke	225 / 250	65L-W0001-00	61A-11181-00


# SOUTHSIDE MARINE COMPONENTS




**Part No: 6G1-W0001-A2**



**Part No: 63V-W0001-00**



**Part No: 682-W0001-03**

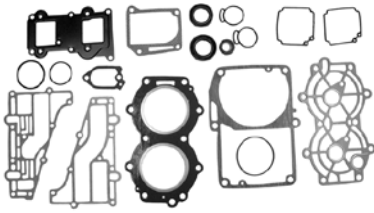

**Part No: 6L2-W0001-00**




**Part No: 61N-W0001-02**



**Part No: 6G0-W0001-00**




**Part No: 695-W0001-00**

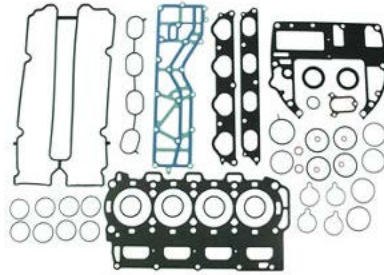


Replaces: 27-804345A02,  
27-858732T02


**Part No: 68V-W0001-03**

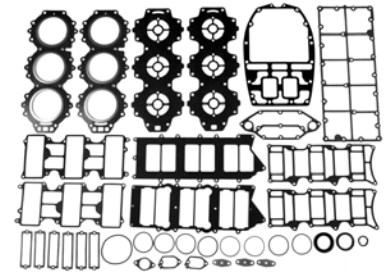


**Part No: 61A-W0001-00**

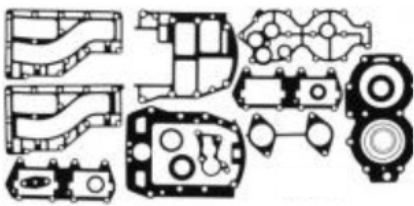

**Part No: 6A0-W0001-01**



**Part No: 68F-W0001-01**




**Part No: 67F-W0001-03**




UNTIL SOLD THEN NLA

**Part No: 697-W0001-02**

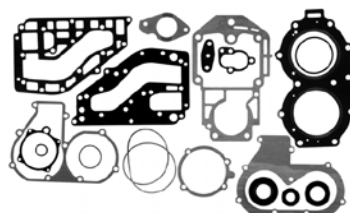

**Part No: 689-W0001-02**




**Part No: 65L-W0001-00**




# SOUTHSIDE MARINE COMPONENTS




**Part No: 66M-W0001-01**




**Part No: 65W-W0001-00**




**Part No: 67C-W0001-00**




**Part No: 6F6-W0001-02**




**Part No: 66T-W0001-01**

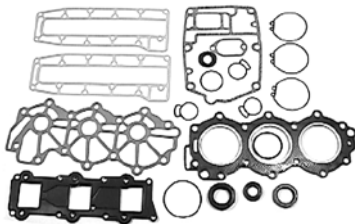


**Part No: 6J8-W0001-01-00**

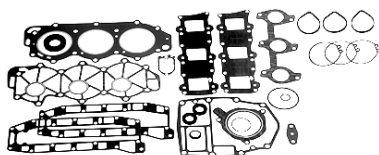


**Part No: 6H4-W0001-02**

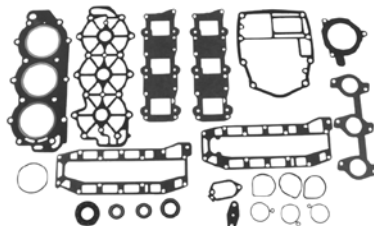


**Part No: 63D-W0001-02**

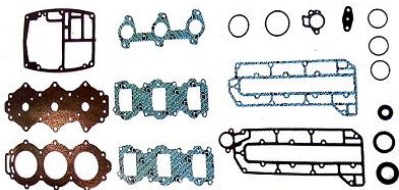


**Part No: 6H3-W0001-02**

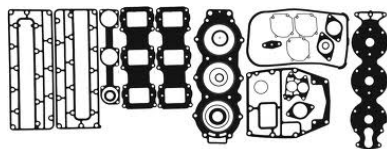


**Part No: 688-W0001-02**



**Part No: 6E5-W0001-A2**

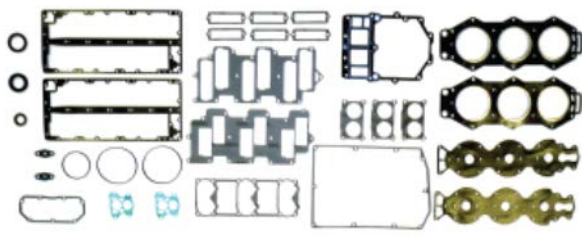




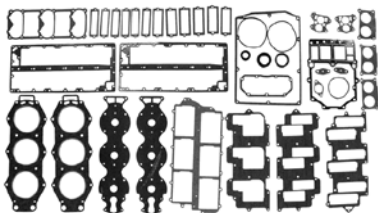












**Part No: 500-347**























**Part No: 6G5-W0001-02**


















# SOUTHSIDE MARINE COMPONENTS

			
Head Gasket 8 HP <b>Part No: 677-11181-01</b>	Head Gasket 9.9 HP 4-Stroke Replaces: 6G8-11181-00 <b>Part No: 27-825482-1</b>	Head Gasket 9.9-15 HP 84-95 <b>Part No: 682-11181-00</b>	Head Gasket 25 HP Twin Carby <b>Part No: 6L2-11181-A1</b>
			
Head Gasket 9.9-15 HP 1997-Up <b>Part No: 63V-11181-A0</b>	Head Gasket 25CV & 30 HP <b>Part No: 689-11181-02</b>	Head Gasket 25 HP Replaces: 695-11181-A0	Head Gasket <b>Part No: 61N-11181-A0</b>
			
Head Gasket 40 HP 2 Cyl <b>Part No: 676-11181-00</b>	Head Gasket 40 HP 2 Cyl <b>Part No: 66T-11181-A2</b>	Head Gasket <b>Part No: 6F5-11181-00</b>	Head Gasket V4 115-140 HP <b>Part No: 6E5-11181-A1</b>
			
Head Gasket 40, 50, 60 HP 2 Cyl <b>Part No: 697-11181-A0</b>		Head Gasket 30 HP 3 Cyl 1987-Up 25 HP 3 Cyl 96-99 <b>Part No: 6J8-11181-A1</b>	Head Gasket 40/ 50 HP 3 Cyl Replaces: 63D-11181-A1 <b>Part No: 6H4-11181-00</b>
		Loctite 518 Gasket Sealant Red 50ml Tube <b>Part No: 518</b>	

# SOUTHSIDE MARINE COMPONENTS





















 <p>Head Gasket V6 225-250 HP <b>Part No: 61A-11181-A0</b></p>	 <p>Head Gasket 3 Cyl 60-70 HP <b>Part No: 6H3-11181-01</b></p>	 <p>Head Gasket 3 Cyl 75-90 HP <b>Part No: 688-11181-A0</b></p>	 <p>Head Gasket V6 150-250 HP <b>Part No: 6G5-11181-A1</b></p>
 <p>Head Gasket 200-225 HP 4-Stroke <b>Port</b> <b>Part No: 69J-11181-03</b></p>	 <p>Head Gasket 200-225 HP 4-Stroke <b>Starboard</b> <b>Part No: 69J-11182-03</b></p>	 <p>Head Gasket 75-115 HP 4-Stroke <b>Part No: 67F-11181-02</b></p>	 <p>Head Cover Gasket <b>Part No: 6G1-11193-A1</b></p>
 <p>Head Cover Gasket <b>Part No: 6L2-11193-00</b></p>	 <p>Head Cover Gasket <b>Part No: 61T-11193-01</b></p>	 <p>Head Cover Gasket <b>Part No: 66T-11193-A2</b></p>	 <p>Head Cover Gasket <b>Part No: 6F6-11193-00</b></p>
 <p>UNTIL SOLD THEN NLA</p> <p>Head Cover Gasket <b>Part No: 6F5-11193-00</b></p>	 <p>Head Cover Gasket 93-98 2-Cyl CV40 HP <b>Part No: 6E9-11193-A0</b></p>	 <p>Head Cover Gasket <b>Part No: 63D-11193-00</b></p>	 <p>Head Cover Gasket 40-50 HP 3 Cyl <b>Part No: 6H4-11193-00</b></p>
 <p>Head Cover Gasket 60-70 3 Cyl <b>Part No: 6H3-11193-00</b></p>	 <p>Head Cover Gasket 3 Cyl 90 HP <b>Part No: 688-11193-A1</b></p>	 <p>Head Cover Gasket V4 <b>Part No: 6E5-11193-A0</b></p>	 <p>Head Cover Gasket V6 <b>Part No: 6G5-11193-A1</b></p>

# SOUTHSIDE MARINE COMPONENTS

 <p>Head Cover Gasket V6 Part No: 61A-11193-00</p>	 <p>Base Gasket Part No: 682-45113-02</p>	 <p>Base Gasket Part No: 63V-45113-A1</p>	 <p>Base Gasket Part No: 677-45113-01</p>	
 <p>Base Gasket Part No: 656-45113-00</p>	 <p>Base Gasket Part No: 689-45113-A1</p>	 <p>Base Gasket Part No: 6L2-45113-A1</p>	 <p>Base Gasket Replaces: 676-45113-00 Part No: 6F5-45113-A0</p>	
 <p>Base Gasket Part No: 66T-45113-A0</p>	 <p>Base Gasket Part No: 6J8-45113-A1</p>	 <p>Base Gasket Part No: 663-45113-00</p>	 <p>Base Gasket Part No: 676-45114-00</p>	 <p>Upper Casing Gasket Part No: 6G1-45113-A1</p>
 <p>Base Gasket 40-50 HP Part No: 6H4-45113-A0</p>	 <p>Base Gasket 40-60 HP 4-Stroke Replaces: 62Y-11351-00, 62Y-11351-01, 27-825231, 27-892319001 Part No: 67C-11351-00</p>	 <p>Base Gasket 60-70 HP Part No: 6H3-45113-A0</p>	 <p>Base Gasket 90 HP 3 Cyl Part No: 688-45113-00</p>	






















# SOUTHSIDE MARINE COMPONENTS





















			
Base Gasket <b>Part No: 6E5-45113-02</b>	Base Gasket V4/ V6 <b>Part No: 6G5-45113-A0</b>	Base Gasket 250 HP V6 76° <b>Part No: 61A-45113-A0</b>	Base Gasket 75, 80, 90, 100, 115 4 Stroke Replaces: 27-85872 1, 67F-11351-00 <b>Part No: 68V-11351-00</b>
			
Sandwich Plate Gasket <b>Part No: 6G5-45114-00</b>	Sandwich Plate Gasket <b>Part No: 682-11351-00</b>	Sandwich Plate Gasket <b>Part No: 63D-45114-A0</b>	Sandwich Plate Gasket <b>Part No: 688-45114-A1</b>
			
Intake V4 <b>Part No: 6E5-13645-A1</b>	Intake V6 <b>Part No: 6G5-13645-A1</b>	Reed V6 "Saltwater" Series <b>Part No: 64E-13645-A0</b>	O/SL Housing <b>Part No: 6H4-15369-00</b>
			
Inner Horizontal Reed V6 <b>Part No: 6K7-13646-A1</b>	Outer Horizontal Reed V6 <b>Part No: 6K7-13645-A1</b>	Outer Intake (metal) 76° V6 <b>Part No: 61A-13645-00</b>	Inner Intake (Metal) 76° V6 <b>Part No: 61A-13646-00</b>
			
Reed Block 60-70 HP 3 Cyl Replaces: 6H3-13622-A1 <b>Part No: 6H3-13621-A1</b>	Reed Block 85-90 HP 3 Cyl <b>Part No: 688-13621-A1</b>	Reed Block 40-50 HP 3 Cyl <b>Part No: 6H4-13621-A1</b>	Exhaust Tube Base Gasket <b>Part No: 63V-41133-A1</b>



# SOUTHSIDE MARINE COMPONENTS

			
Manifold Gasket Replaces: 27-881433 <b>Part No: 68V-13645-00</b>	Manifold Gasket <b>Part No: 6D8-13645-00</b>	Manifold Gasket Replaces: 27-804161 <b>Part No: 67F-13645-00</b>	
 Water Passage Cover V4/ V6 <b>Part No: 6E5-11381-A1</b>	 Exhaust Manifold Gasket <b>Part No: 6H4-41134-A0</b>	 Exhaust Gasket Inner <b>Part No: 6G1-41112-A1</b>	 Exhaust Gasket Outer <b>Part No: 6G1-41114-A0</b>
 Exhaust Gasket Inner <b>Part No: 6E0-41112-A1</b>	 Exhaust Gasket Outer <b>Part No: 6E0-41114-A1</b>	 Exhaust Gasket Inner & Outer Replaces: 682-41112-00 <b>Part No: 682-41114-01</b>	 Exhaust Gasket Inner & Outer Replaces: 63V-41114-A0 <b>Part No: 63V-41112-A0</b>
 Exhaust Gasket Inner <b>Part No: 689-41112-00</b>	 Exhaust Gasket Outer <b>Part No: 689-41114-00</b>	 Exhaust Gasket Inner <b>Part No: 6K8-41122-A1</b>	 Exhaust Gasket Outer <b>Part No: 6K8-41124-A1</b>
 Inner & Outer Exhaust 40-50 HP 3 Cyl Replaces: 6H4-41112-00 <b>Part No: 6H4-41114-00</b>	 Outer Exhaust CV40 HP 2 Cyl 93-98 <b>Part No: 6E9-41114-A0</b>	 Inner Exhaust CV40 HP 2 Cyl 93-98 <b>Part No: 676-41112-A0</b>	 Exhaust Gasket <b>Part No: 6F5-41112-00</b>















# SOUTHSIDE MARINE COMPONENTS

 <p>Exhaust Gasket Inner/ Outer 6-8HP <b>Part No: 677-41112-01</b></p>	 <p>Exhaust Gasket Inner/ Outer E25 HP Replaces: 6G0-41112-00 <b>Part No: 6G0-41114-00</b></p>	 <p>Inner Exhaust 60-70 HP 3 Cyl <b>Part No: 6H3-41112-A0</b></p>	 <p>Outer Exhaust 60-70 HP 3 Cyl <b>Part No: 6H3-41114-A0</b></p>
 <p>Outer and Inner Replaces: 664-41112-00 <b>Part No: 664-41114-00</b></p>	 <p>Exhaust Gasket 75-115 hp 4 Stroke Replaces: 67F-41114-A0 <b>Part No: 27-804076003</b></p>	 <p>Inner <b>Part No: 6L2-41112-A1</b></p>	 <p>Outer <b>Part No: 6L2-41114-A1</b></p>
 <p>Exhaust 85-90 HP 3 Cyl Replaces: 688-41114-00 <b>Part No: 688-41112-00</b></p>	 <p>Exhaust Cover V4 Replaces: 6E5-41114-A0 <b>Part No: 6E5-41112-A1</b></p>	 <p>Exhaust Cover Inner/Outer V6 Replaces: 6G5-41114-A0 <b>Part No: 6G5-41112-00</b></p>	 <p>Exhaust Cover V6 <b>Part No: 61A-41112-A0</b></p>
 <p>Water Pump Gasket <b>Part No: 6EO-44315-A0</b></p>	 <p>Water Pump Gasket <b>Part No: 6G1-44315-A0</b></p>	 <p>Water Pump Gasket <b>Part No: 689-44315-00</b></p>	 <p>Water Pump Gasket <b>Part No: 689-44324-00</b></p>
 <p>Water Pump Gasket <b>Part No: 689-44316-00</b></p>	 <p>Water Pump Gasket <b>Part No: 676-44315-00</b></p>	 <p>Water Pump Gasket <b>Part No: 676-44324-00</b></p>	 <p>Water Pump Gasket <b>Part No: 676-44316-00</b></p>

# SOUTHSIDE MARINE COMPONENTS

 <p>Water Pump Gasket Part No: 663-44315-00</p>	 <p>Water Pump Gasket Part No: 663-44324-00</p>	 <p>Water Pump Gasket Part No: 663-44316-00</p>	 <p>Water Pump Gasket Part No: 6H3-44315-00</p>
 <p>Water Pump Gasket Part No: 6H3-44324-00</p>	 <p>Water Pump Gasket Part No: 688-44315-00</p>	 <p>Water Pump Gasket Part No: 688-44324-00</p>	 <p>Water Pump Gasket Part No: 682-44315-00</p>
 <p>Water Pump Gasket Replaces: 6H3-44316-00 Part No: 688-44316-00</p>	 <p>Water Pump Gasket Part No: 63D-44316-00</p>	 <p>Water Pump Gasket Part No: 6E5-44315-00</p>	 <p>Relief Valve Gasket V4/ V6 Part No: 6G5-11382-A1</p>
 <p>Packing Lower Case Gasket Part No: 6E0-45315-A0</p>	 <p>Packing Lower Case Gasket Part No: 6L2-45315-A0</p>	 <p>Packing Lower Case Gasket Part No: 6G1-45315-A0</p>	 <p>Packing Lower Case Gasket Part No: 63V-45315-00</p>
 <p>V4/V6 ONLY Poppet Valve Kit Replaces: 6G5-12416-00 Part No: 60H-12416-00</p>	 <p>Grommet Part No: 90480-20M05</p>	 <p>Water Seal Damper Part No: 6L2-44367-00</p>	 <p>Water Seal Damper Part No: 647-44366-00</p>
 <p>Shift Rod Boot Replaces: 655-4147-00 Part No: 6G1-44147-00</p>	 <p>Shift Rod Boot Replaces: 682-44147-00 Part No: 664-44147-00</p>	 <p>Shift Rod Boot Part No: 6L2-44147-00</p>	 <p>Hose Nipple Part No: 6E5-45378-00</p>

# SOUTHSIDE MARINE COMPONENTS





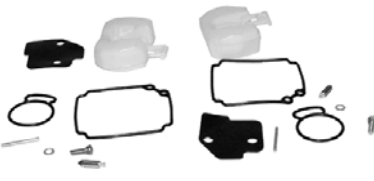
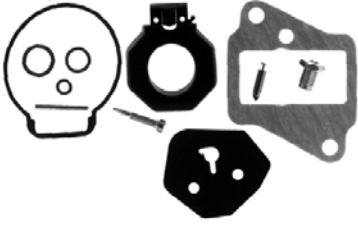
			
Thermo Cover 9.9-15 HP <b>Part No: 682-12414-A1</b>	Thermo Cover 20-25 HP <b>Part No: 655-12414-00</b>	Thermo Cover CV40 HP 93-98 2 Cyl <b>Part No: 6E9-12414-A0</b>	
			
Thermo Cover 2 Stroke 60-70 HP 3 Cyl 4 stroke 9.9-70 HP Replaces: 62Y-12414-00 <b>Part No: 6H3-12414-A1</b>	Thermo Cover 75, 85, 90 HP V4-V6 <b>Part No: 688-12414-A1</b>	Thermo Cover Replaces: 61A-12414-00 Replaces: 6J8-12414-00 <b>Part No: 6H4-12414-00</b>	Thermo Cover 55 HP <b>Part No: 663-12414-A0</b>
			
Thermo Cover 40 HP <b>Part No: 676-12414-00</b>	Pressure Control Cover Gasket 4 Stroke 4-Cyl <b>Part No: 67F-12435-A0</b>	Thermostat 60° 9.9-15 HP 86-95, All 2 Cyl CV Models Replaces: 656-12411-01 <b>Part No: 6F5-12411-02</b>	
			
Thermostat 50° 2-Stroke 4HP-V6 Replaces: 688-12411-00 6H3-12411-11 <b>Part No: 6E5-12411-20</b>	Thermostat 60° 4 Stroke 9.9-60HP Replaces: 6G8-12411-02 <b>Part No: 66M-12411-01</b>	Thermostat 50° 225-300 2 Stroke 03-Up 115 4 Stroke 00-Up Replaces: 68V-12411-00 <b>Part No: 60V-12411-00</b>	Thermostat 60° 80-300 HP 4-Stroke Replaces: 6D9-12411-00 <b>Part No: 67F-12411-00</b>

## Thermostat Conversion Guide

143 Degrees Fahrenheit  
= 60 Degrees Celsius (61.6)  
120 Degrees Fahrenheit  
= 50 Degrees Celsius (48.9)


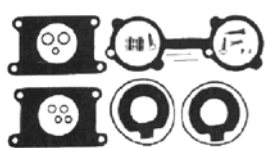













133 = 56.11  
130 = 54.44  
105 = 40.55

# SOUTHSIDE MARINE COMPONENTS

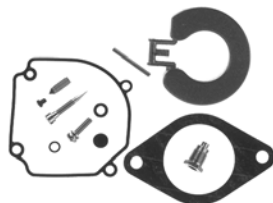










YAMAHA CARBURETTOR KITS			 <p>Carb Kit All 2 HP <b>Part No: 6A1-W0093-01</b></p>
HP	YEAR	PART NO.	
2	All	6A1-W0093-01	 <p>Carb Kit All 3 HP 6-8 HP 84-Current Replaces: 6NO-W0093-00 <b>Part No: 6G1-W0093-00</b></p>
3	All	6G1-W0093-00	
6 - 8	84-Current	6G1-W0093-00	 <p>Carb Kit 9.9-15 HP 96-Up <b>Part No: 63V-W0093-00</b></p>
9.9-15	1985-95	6E7-W0093-04	
9.9-15	96-Current	63V-W0093-00	 <p>Carb Kit 25-30 HP 84-97 <b>Part No: 689-W0093-02</b></p>
20- 25 (2 Carby)	88-Current	6L2-W0093-00*	
25	1984-1987	689-W0093-02	 <p>Carb Kit 20-25HP 88-Current 2 Carby <b>Part No: 6L2-W0093-00</b></p>
25C	1990-1997	689-W0093-02	
25- 30 (1 Carby)	93-Current	61N-W0093-00	 <p>Carb Kit 9.9-15 HP 85-95 <b>Part No: 6E7-W0093-04</b></p>
30	1984-1986	689-W0093-02	
30C	1989-1992	689-W0093-02	
40- 55 CV	90-Current	696-W0093-02*	
40- 50 3-Cyl	1984-1988	6H4-W0093-01	
40- 50 3-Cyl	89-Current	6H4-W0093-03	
F40	1999	62Y-W0093-00	
F50	95-97,99-00	62Y-W0093-00	
60- 70	84-Current	6H3-W0093-02**	
60 -70	1992-Current	6H1-W0093-10**	
75- 85	93-97 , 01-06	6H1-W0093-01	
80- 90	1989-1991	6H1-W0093-01	
80	1992-1996	6H1-W0093-10	
90	92-97 , 00-12	6H1-W0093-10	
F80- F100	1999-2002	67F-W0093-00	
V4-V6	All 1 Float	6G5-W0093-10 #	
V4-V6	All 2 Float	6E5-W0093-06	
225- 250 V6	90-03, 76 °	61A-W0093-01	
* Enough to rebuild 2 Carburettors			
# Enough to rebuild 3 Carburettors			
** Check Model for Correct Application			



# SOUTHSIDE MARINE COMPONENTS

 <p>Carb Kit 25- 30 HP 93-Current 1 Carby <b>Part No: 61N-W0093-00</b></p>	 <p>Carb Kit 40-55CV 90-Current <b>Part No: 696-W0093-02</b></p>	 <p>Carb Kit 40-50 HP 3 Cyl 88-Current <b>Part No: 6H4-W0093-03</b></p>	 <p>Carb Kit F 40 / F50 HP Replaces: 809594A1 <b>Part No: 62Y-W0093-00</b></p>
 <p>Carb Kit <b>**CHECK MODEL/APP CHART</b> 1984-Current 60-70 HP <b>Part No: 6H3-W0093-02</b></p>	 <p>Carb Kit <b>**CHECK MODEL/APP CHART</b> 60-70 HP, 80-90HP Replaces: 6H2-W0093-10 <b>Part No: 6H1-W0093-10</b></p>	 <p>Carb Kit 75-90 HP <b>Part No: 6H1-W0093-01</b></p>	
 <p>Carb Kit 1999-02 F80-F100 <b>Part No: 67F-W0093-00</b></p>	 <p>Carb Kit Single Bowl V4/V6 <b>Part No: 6G5-W0093-10</b></p>	 <p>Carb Kit Double Bowl V4/V6 <b>Part No: 6E5-W0093-06</b></p>	 <p>Carb Kit 90-03 V6 76° 225-250 HP <b>Part No: 61A-W0093-01</b></p>
 <p>Carb Kit 40-50 Cyl 84-88 <b>Part No: 6H4-W0093-01</b></p>	 <p>Needle 25-30 HP <b>Part No: 61N-14392-00</b></p>	 <p>Needle and Seat 40-50 HP <b>Part No: 6H4-14590-00</b></p>	 <p>Needle and Seat VARIOUS MOTORS 40-90 HP 2 STROKE 80-100 4 STROKE Replaces: 6H3-14590-01 <b>Part No: 692-14590-00</b></p>

# SOUTHSIDE MARINE COMPONENTS

 <p>Float Bowl Gasket V4 / V6 <b>Part No: 64D-14384-00</b></p>	 <p>Carb Mount Gasket V4 / V6 <b>Part No: 6E5-14198-A1</b></p>	 <p>Carb Mount 75-90 HP 3 Cyl <b>Part No: 688-14198-00</b></p>
 <p>Reed Block Gasket V4 / V6 <b>Part No: 6E5-13621-A1</b></p>	 <p>High Pressure Fuel Pump    200HP 1998, 225-250HP 97-99 Replaces: 65L-13907-00 <b>Part No: 809088T-1</b></p>	
 <p>Fuel Pump 25-90 HP 2 Stroke <i>Does not come with a mounting gasket</i> Replaces: 6A0-24410-01 <b>Part No: 692-24410-01</b></p>	 <p>Fuel Pump V4/ V6 2 Stroke <i>Does not come with a mounting gasket</i> <b>Part No: 6E5-24410-01</b></p>	 <p>Fuel Pump 25-60hp 4 Stroke Replaces: 62Y-24410-02/03 <b>Part No: 62Y-24410-04</b></p>
 <p>6 -9.9 HP 4 Stroke <b>Part No: 68T-24410-01</b></p>	 <p>9.9-15 HP 4 Stroke 2005- Up <b>Part No: 66M-24410-11</b></p>	
		
<p>Inner &amp; Outer Fuel Pump Diaphragm Kit FOR ENGINE BLOCK MOUNTED FUEL PUMPS ONLY <i>Does not come with a mounting gasket</i> 25-90 HP <b>Part No: 648-24410-00</b></p>	<p>Inner &amp; Outer Fuel Pump Diaphragm Kit 90° V4 &amp; V6 115-200 HP 76° V6 225-250 HP <b>Part No: 6E5-6G5 F/Pump</b></p>	<p>Fuel Pump Mounting Gasket 3 Cyl 25-90 HP V4/V6 <b>Part No: 650-24431-00</b></p>

# SOUTHSIDE MARINE COMPONENTS



**Part No: 6E0-24471-00**



**Part No: 677-24471-00**



**Part No: 677-24411-00**



**Part No: 6G8-24411-00**



**Part No: 6G8-14368-00**



**Part No: 6G1-24471-00**



**Part No: 6J8-24471-00**



**Part No: 648-24434-01**



**Part No: 663-24411-00**



**Part No: 6E5-24411-00**



**Part No: 648-24411-00**



**Part No: 648-24435-02**



**Part No: 6E5-24471-00**



Primer Bulb and Hose  
Hose 5/16" 8mm  
**Part No: 6Y1-24306-01**



Primer Bulb

For 5/16" Hose 8mm  
**Part No: 6Y1-24360-02**

For 1/4" Hose 6mm  
**Part No: 6YL-24360-63**  
For 3/8" Hose 10mm  
**Part No: 174511**

**Fuel Hose – Sold per Metre**



4mm

**Part No: VP1004**



6mm

**Part No: VP1006**



5/16 (8mm)

**Part No: 116-315-0560**

3/8 (10mm)

**Part No: 116-3154-1000**



# SOUTHSIDE MARINE COMPONENTS

<div><div>INLINE FUEL FILTERS</div><div>(1/4" Glass)</div><div>Part No: 35-16494G</div><div><div>5/16" Hose 8mm Part No: 35-816296-1</div><div>1/4" Hose 6mm Part No: 35-16494</div><div>3/8" Hose 10mm Part No: 398319</div><div>For 5/16" in 3/8" Out Part No: 435918</div></div></div> <div></div>				
<div><div></div><div>Tank Connector To suit VP3041 Fuel Connector Part No: VP3073</div></div>	<div><div></div><div>S/S Filter Adapter Part No: VP25010</div></div>	<div><div></div><div>Filter Part No: 35-60494</div></div>		
<div><div>Tails</div><div></div></div>				
<div><div>1/8" x 5/16" Part No: P30502</div></div>	<div><div>1/4" x 5/16" Part No: P30504</div></div>	<div><div>1/8" x 3/8 " Part No: P30602</div></div>	<div><div>1/4" x 3/8 " Part No: P30604</div></div>	<div><div>Elbow Tail 5/16" x 1/4" Part No: P3433</div></div>
<div><div></div><div>Filter Part No: VPR35-60494</div></div>	<div><div></div><div>Filter Kit</div></div>		<div><div></div><div>Filter / Clear Bowl Part No: VPRK35-60494</div></div>	
<div><div></div><div>Universal inline Filter Part No: 646-24251-02</div></div>	<div><div></div><div>Filter F6-F8 2001-Up Replaces: 369-02230-0 Part No: 68T-24251-00</div></div>		<div><div></div><div>Fuel Filter 4 ST 150-250 HP Replaces: 65L-24563-00 Part No: 35-888289T2</div></div>	
<div><div></div><div>Inline Mini Fuel Filter 5mm 3/16 Part No: VP191</div></div>	<div><div></div><div>Fuel Filter 4 St 9.9 - 40 HP 98-09 Replaces: 65W-24251-00, 65W-24251-10 Part No: 35-816296-1</div></div>	<div><div></div><div>Fuel Filter 4 Stroke 30-100hp 05-Up Part No: 6C5-24251-00</div></div>	<div><div></div><div>Fuel Filter 4 Stroke 75-115 HP (WITHOUT SENSOR) Part No: 68V-24563-00</div></div>	

# SOUTHSIDE MARINE COMPONENTS

 <p>O-ring Replaces: 93210-32738 <b>Part No: 93210-37M25</b></p> <p>Fuel Filter <b>Part No: 61N-24560-00-00</b></p>	 <p>Fuel Filter 4 Stroke 30-115 HP 2006-Up <b>(WITH SENSOR)</b> Replaces: 6D8-24563-00 <b>Part No: 6D8-WS24A-00</b></p>	 <p>O-ring Replaces: 93210-32738 <b>Part No: 93210-37M25</b></p> <p>Fuel Filter Various Motors 115-225HP 1994-Up <b>Part No: 6R3-24560-00</b></p>	
 <p>Fuel Filter F150-350HP Replaces: 6P3-24563-00 <b>Part No: 6P3-WS24A-01</b></p>	<p>Fuel Connector</p>  <p><b>Part No: 6Y1-24305-01</b> Deluxe</p> <p><b>Part No: VP3041</b> Standard</p>	 <p>Sump Bung Washer 14mm I.D. <b>Part No: 90430-14M09</b></p>	
 <p>Oil Filter 9.9 HP 4 Stroke <b>Part No: 6G8-13440-0</b></p>	 <p>Oil Filter <b>Part No: 15400-PFB-004</b></p>	 <p>Oil Filter <b>Part No: 5GH-13440-00</b></p>	 <p>Oil Filter <b>Part No: 69J-13440-00</b></p>
 <p>Alloy Filter Adapter Includes 2 x 5/16 tails <b>Part No: 89876A3</b></p>	 <p>Filter Kit (S/S Head) Includes 5/16" Tails <b>Part No: VPS35-60494A4</b></p>		 <p>Filter Kit (Alloy Head) Includes 5/16" Tails <b>Part No: 35-60494A4</b></p>
 <p>Oil Filter <b>Part No: N26-13440-00</b></p>	 <p>Mini Racor Kit <b>Part No: VP3350</b></p>	 <p>Mini Racor Filter <b>Part No: VP3355</b></p>	

# SOUTHSIDE MARINE COMPONENTS

## RACOR FILTERS

Part No.	Filter Head Type	Replaces
<b>VPR35-60494</b>	Mercury, Yamaha	Racor S3213
<b>VPS3214</b>	OMC	Racor S3214
<b>VPS3227</b>	Honda	Racor S3227
<b>VP3350</b>	Mini Racor Kit	

## MERCURY / YAMAHA FILTER KITS

Part Number	Contents
<b>VPRC/K 35-60494</b>	Alloy Head, Fuel Filter, Clear Bowl, 2 x 5/16" Tails and 2 x Bungs
<b>VPRC/KSS 35-60494</b>	S/S Head, Fuel Filter, Clear Bowl, 2 x 5/16" Tails and 2 x Bungs
<b>VPRK35-60494</b>	Filter / Clear Bowl
<b>VPR1000</b>	Clear Bowl and O-ring

## 4-Stroke Oil Filter Applications

HP	BRAND	PART NUMBER
9.9-50HP	TOHATSU	3R0-07615-0
Up to 70 HP	YAMAHA	15400-PFB-004
80-115 HP	YAMAHA	5GH-13440-00
150A, 150B, 200A, 200C, 200F, 200G, 225A, 250A, 250B <b>2002 – CURRENT (CHECK MODEL)</b>	YAMAHA	69J-13440-00
200D, 225D, 225F, 250C, 250D, 300A, 300B, 350A <b>2008- CURRENT (CHECK MODEL)</b>	YAMAHA	N26-13440-00
Up to 75 HP	HONDA	15400-PFB-004
75-250 HP	HONDA	5GH-13440-00
UP TO 60 HP	MERC/YAMAHA	15400-PFB-004
75-115 HP	MERC/YAMAHA	5GH-13440-00
75-115HP EFI <b>1B366823-2B059605</b>	MERCURY	35-877761
75-115HP EFI <b>2B080987 &amp; UP</b>	MERCURY	5GH-13440-00
135-200 HP VERADO 4 CYL	MERCURY	35-877767
225-300 HP VERADO 6 CYL	MERCURY	35-877769
150-300 HP	MERC/YAMAHA	69J-13440-00
25-70HP GENUINE	SUZUKI	16510-87J00
25-140HP AFTERMARKET	SUZUKI	16510-92J00
70-140HP AFTERMARKET VERTICALLY MOUNTED <b>LATER MODELS</b>	SUZUKI	16510-61A31
150-300HP	SUZUKI	16510-93J00
15HP	OMC	434839

YAMAHA IMPELLERS AND REPAIR KITS					
Model	Cyl	Year	Impeller	Impeller Repair Kit W/O Housing	Housing
2 HP	1	1978- Current	646-44352-00	N/A	N/A
F2.5 / 3 HP	1	1988- Current	6L5-44352-00	N/A	N/A
4 / 5 HP / F4	1	1982- Current	6EO-44352-00	N/A	N/A
6 - 8 HP	2	1984- Current	6G1-44352-00	N/A	N/A
F6	4	2001	68T-44352-00	N/A	63V-44301-00
FT8	2	2001-Current	63V-44352-00	N/A	63V-44301-00
F8 CMH	2	2001- Current	68T-44352-00	N/A	63V-44301-00
8 / 15 HP	2	1977-80	662-44352-00	N/A	N/A
F9.9 FMH	2	2008 - Current	68T-44352-00	N/A	63V-44301-00
F9.9 / F15	2	1996-Current	63V-44352-00	63V-W0078-00	63V-44301-01
F9.9 A / B	2	1986-95	682-44352-00	682-W0078-00	682-44300-01
9.9 / 15	2	1980-95	682-44352-00	682-W0078-00	682-44300-01
9.9 / 15 FMH	2	2000- Current	63V-44352-00	63V-W0078-00	63V-44301-00
20 (2 Carby)	2	1996-97	6L2-44352-00	6L2-W0078-00	6L2-44311-00
F20	2	2007- Current	63V-44352-00	N/A	N/A
25	2	1984-87	689-44352-00	694-W0078-00	689-44311-00
25 (2 Carby)	2	1988- Current	6L2-44352-00	6L2-W0078-00	6L2-44311-00
C25	2	1990-97	689-44352-00	689-W0078-00	689-44311-00
25 / CV30	2	1996-Current	6H4-44352-00	61N-W0078-00	69P-44311-00
F25	2	1998-02	6H4-44352-00	66T-W0078-00	66T-44311-00
30 C30	2	1985-89 1991-92	689-44352-00	N/A	689-44311-00
30	3	ALL	6H4-44352-00	6J8-W0078-00	6J8-44311-00
F30	2	2001-04	6H4-44352-00	66T-W0078-00	66T-44311-00
F40 / F50	4	1999	6H3-44352-00	N/A	63D-44311-00
F40 / F50	4	2000-04	6H4-44352-00	66T-W0078-00	63D-44311-00
40	3	1991-92 1984-93	676-44352-00	676-W0078-00	66T-44311-00
50	3	1984-93	6H4-44352-00	6H4-W0078-00	676-44311-00
40	3	1985-94	6H4-44352-00	6H4-W0078-00	6J8-44311-00
CV40 (6R6)	2	1990-94	676-44352-00	676-W0078-00	6J8-44311-00
40-50 HP	3	1995-03	6H3-44352-00	63D-W0078-00	676-44311-00
F50B/T50	4	1999	6H3-44352-00	6H3-W0078-00	6H3-44311-00
F50 4 Stroke	4	1996-02	6H3-44352-00	N/A	63D-44311-00
55	3	1989-00	6H3-44352-00	663-W0078-00	6J8-44311-00
P60-E60	3	1991-00	6H3-44352-00	N/A	6H3-44311-00
F60	3	2002	6H3-44352-00	N/A	N/A
60/70	3	1984-93	6H3-44352-00	6H3-W0078-00	63D-44311-00
70	3	1984-03	6H3-44352-00	6H3-W0078-00	6H3-44311-00
60 / 70	3	2004-Current	688-44352-00	688-W0078-00	688-44311-01
C75, C85 (688) CV85 (688) 90 (6H1)	3 3 3	1991-UP 1989-90 1984-02	688-44352-00	688-W0078-00	688-44311-01
F80 / F100	4	2000-UP	67F-44352-00	67F-W0078-00	67F-44311-01
C115 (6E5)	4	1991-92	6E5-44352-00	6G5-W0078-00	6E5-44311-00
C115 (6EF)	4	1993	6E5-44352-00	6N6-W0078-00	61A-44311-00
C115 (6E5)	4	1994	6E5-44352-00	6N6-W0078-00	61A-44311-00
P115 (62A) 115 (6N6)	4	1993-UP 1994	6E5-44352-00	6N6-W0078-00	61A-44311-00
115 (6N6) 115 (6E5)	4	1990-92 1989-94	6E5-44352-00	6G5-W0078-00	6E5-44311-00
F115 / LF115	4	2000-04	6E5-44352-00	68V-W0078-00	61A-44311-00






YAMAHA IMPELLERS AND REPAIR KITS					
Model	Cyl	Year	Impeller	Impeller Repair Kit W/O Housing	Housing
130 (6L1), (6L) 130 (6N7), (6N4)	4	1988-89 1990-92	6E5-44352-00	6G5-W0078-00	6E5-44311-00
130 (6N7), (6N4)	4	1993-94	6E5-44352-00	6N6-W0078-00	61A-44311-00
L150 (6R0), (6R2) 150 (6K0), (6G4)	6	1990 1986-89 1991	6E5-44352-00	6G5-W0078-00	6E5-44311-00
L150 (6R0), (6N4)	6	1992-94	6E5-44352-00	61A-W0078-00	61A-44311-00
150 (6R2), (6G4)	6	1985-91	6E5-44352-00	6G5-W0078-00	6E5-44311-00
150 (6R2) P150 (6N9)	6	1992-94 1992-93	6E5-44352-00	61A-W0078-00	61A-44311-00
P150 (6N9)	6	1991	6E5-44352-00	6G5-W0078-00	6E5-44311-00
F150 BETX (PLASTIC HOUSING)	6	2011-12	6E5-44352-00	61A-W0078-00	61A-W0078-00
L150 (6R0), (6R2) P150, Z150, LZ150, VX150, SX150, V150, VZ150, F150, LF150	6	1992-99 2001-04 1999-02 2004	6E5-44352-00	61A-W0078-00	61A-44311-00
150 / 175 / 200 ETLN PRO V150D (6N9) PRO V150 (6J9) 175 (6R3) 175 (6G5)	6	1984 1990 1986-89 1990-91 1985-89	6E5-44352-00	6G5-W0078-00	6E5-44311-00
175 (6R3) P175 (62H) VZ175, Z175	6	1992-2000 1994-99 2001-04	6E5-44352-00	61A-W0078-00	61A-44311-00
200 (6R4), (6R1) 200 (6G6), (6K1)	6	1990-91 1985-89	6E5-44352-00	6G5-W0078-00	6E5-44311-00
L200 (6R1), (6R4) P200 (61H) SX200 VZ200, Z200, LZ200, VXZ200, F200, LF200	6	1991-99 1991-94 1999-02 2001-04 2002-04	6E5-44352-00	61A-W0078-00	61A-44311-00
225 (6R5)	6	1990-91	6E5-44352-00	6G5-W0078-00	6E5-44311-00
225 (6R5) (62J) 225, L225, S225 (62K) 250 (61A), L250 (61B), VX225, VX250 F225, LF225, VZ225, VZ250, Z250, LZ250 Z300, LZ300	6	1992-97 (1) 1994-99 (2) 1990-94 1990-02 2000-04 2002-04 2003-04 (3) 2004 (3)	6E5-44352-00	61A-W0078-00	61A-44311-00
V-6 EXCEL (6K7) V-6 SPECIAL (6G7)	6	1987-89 1984-86	6E5-44352-00	6G5-W0078-00	6E5-44311-00

(1) 2.6L Engine  
(2) 3.1L Engine  
(3) 3.3L Engine  
F = Four Stroke

V = V Max  
Models  
VZ = V Max HPDI  
X = 0X66 EFI  
Z = HPDI



# SOUTHSIDE MARINE COMPONENTS

 <p>ID: 9.9 OD: 36 H: 14.5</p> <p><b>Part No: 6L5-44352-00</b></p>	 <p>ID: 11.15 OD: 47.5 H: 13.7</p> <p><b>Part No: 646-44352-00</b></p>	 <p>ID: 11 OD: 40 H: 12.6</p> <p><b>Part No: 6E0-44352-01</b></p>	 <p>ID: 14 OD: 69.5 H: 13.1</p> <p>Replaces: 656-44352-00, 694-44352-00</p> <p><b>Part No: 6GO-44352-00</b></p>
 <p>ID: 14 OD: 40 H: 22</p> <p>Replaces: 47-95611M</p> <p><b>Part No: 662-44352-00</b></p>	 <p>ID: 12.85 OD: 53 H: 14</p> <p><b>Part No: 63V-44352-01</b></p>	 <p>ID: 13 OD: 40 H: 22</p> <p><b>Part No: 682-44352-00</b></p>	 <p>ID: 11.7 OD: 52.8 H: 14</p> <p><b>Part No: 68T-44352-00</b></p>
 <p>ID: 16.15 OD: 69.5 H: 12.8</p> <p>Replaces: 664-44352-00</p> <p><b>Part No: 689-44352-02</b></p>	 <p>ID: 16.1 OD: 51 H: 19</p> <p>Replaces: 879127</p> <p><b>Part No: 6H4-44352-00</b></p>	 <p>ID: 18.05 OD: 51.80 H: 19.05</p> <p>Replaces: 697-44352-00, 879124</p> <p><b>Part No: 6H3-44352-00</b></p>	
 <p>ID: 20.01 OD: 58 H: 30</p> <p>Replaces: 879120</p> <p><b>Part No: 688-44352-00</b></p>	 <p>ID: 20 OD: 58.2 H: 34.7</p> <p><b>Part No: 67F-44352-00</b></p>	 <p>ID: 22.45 OD: 89 H: 31</p> <p>Replaces: 879126</p> <p><b>Part No: 6E5-44352-00</b></p>	 <p>ID: 24.85 OD: 89 H: 36</p> <p><b>Part No: 6AW-44352-00</b></p>
 <p>ID: 11.9 OD: 40 H: 18</p> <p><b>Part No: 6G1-44352-00</b></p>	 <p>ID: 14.1 OD: 51 H: 19</p> <p>Replaces: 879128</p> <p><b>Part No: 6L2-44352-00</b></p>	 <p>ID: 16 OD: 69.8 H: 22.1</p> <p>Replaces: 676-44352-00, 47-99971M</p> <p><b>Part No: 6F5-44352-00</b></p>	 <p>ID: 22.6 OD: 88.5 H: 35.5</p> <p><b>Part No: 6CE-44352-00</b></p>

# SOUTHSIDE MARINE COMPONENTS



Repair Kit  
without Housing  
**Part No:**  
**6E0-W0078-01**



Repair Kit  
without Housing  
**Part No:**  
**63V-W0078-00**



Repair Kit  
without Housing  
**Part No:**  
**682-W0078-A1**



Repair Kit  
without Housing  
**Part No:**  
**6L2-W0078-00**



Repair Kit  
without Housing  
**Part No: 694-W0078-00**



Repair Kit  
without Housing  
**Part No: 689-W0078-00**



Repair Kit  
without Housing  
**Part No: 6J8-W0078-00**



Repair Kit without  
Housing  
Replaces: 69P-W0078-00  
**Part No: 61N-W0078-00**



Repair Kit  
without Housing  
**Part No: 66T-W0078-00**



679-44316-A0 Sold Separately  
Repair Kit  
without Housing  
**Part No: 676-W0078-00**















Repair Kit  
without Housing  
**Part No: 6H4-W0078-00**



Repair Kit  
without Housing  
**Part No: 6BG-W0078-00**
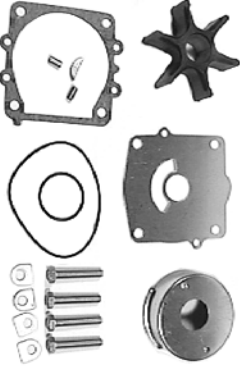
# SOUTHSIDE MARINE COMPONENTS

			
<p>Repair Kit without Housing <b>Part No: 688-W0078-00</b></p>	<p>Repair kit without Housing <b>Part No: 67F-W0078-00</b></p>	<p>Repair Kit without Housing <b>Part No: 6G5-W0078-00</b></p>	<p>Repair Kit without Housing <b>Part No: 692-W0078-00</b></p>
			
<p>Repair Kit without Housing Replaces: 6S1-W0078-00 <b>Part No: 61A-W0078-01</b></p>	<p>Repair Kit without Housing <b>Part No: 68V-W0078-00</b></p>	<p>Repair Kit without Housing <b>Part No: 6N6-W0078-00</b></p>	<p>Repair Kit without Housing Replaces: 6G1-W0078-A0 <b>Part No: 6N0-W0078-00</b></p>
			
<p>Repair Kit without Housing <b>Part No: 63D-W0078-01</b></p>	<p>Repair Kit without Housing <b>Part No: 6H3-W0078-00</b></p>	<p>Repair Kit without Housing <b>Part No: 663-W0078-00</b></p>	<p>Repair Kit without Housing <b>Part No: 6P2-W0078-00</b></p>

# SOUTHSIDE MARINE COMPONENTS



**GENUINE IMPELLER INC**

Repair Kit  
without Housing  
**Part No: 6AW-W0078-00**



Water Pump Housing  
**Part No: 63V-44301-00**



Water Pump Housing  
Replaces:  
61N-44311-00  
**Part No: 69P-44311-00**



Water Pump Housing  
**Part No: 6L2-44311-00**



Water Pump  
Housing  
**Part No: 689-44311-03**



Water Pump  
Housing  
**Part No: 688-44311-01**



Water Pump  
Housing  
Replaces:  
663-44311-02  
**Part No: 6J8-44311-00**



Water Pump  
Housing  
**Part No: 682-44300-01**



Water Pump  
Housing  
**Part No: 66T-44311-00**



Water Pump  
Housing  
**Part No: 676-44311-00**



Water Pump  
Housing  
**Part No: 6E5-44311-00**



Water Pump  
Housing  
**Part No: 67F-44311-00**



Water Pump Hsg  
Replaces: 6N0-G4311-00,  
6G1-44311-00  
**Part No: 6N0-G4311-00**



Water Pump Housing  
**Part No: 63D-44311-00**



Water Pump Housing  
**Part No: 6H3-44311-00**

















Water Pump Housing  
**Part No: 6AW-44311-01**



Water Pump Housing  
**Part No: 61A-44311-01**



# SOUTHSIDE MARINE COMPONENTS

		 <b>EMPTY HOUSING ONLY</b> SEALS AND O’RING 93210-48MG8 SOLD SEPERATELY		
Water Pump Base / Lower Housing Replaces: 6D8-44341-00, 6D8-WS443-00 <b>Part No: 688-44341-01-94</b>	Water Pump Base / Lower Housing <b>Inc’s 93101-25M57 Seals and 93210-48MG8 O’Ring</b> Replaces: 63D-W4434-00 <b>Part No: 63B-Y429H-K1</b>	CALL FOR THE CORRECT SEALS FOR YOUR MOTOR Replaces: 63D-44341-00 <b>Part No: 6BG-44341-00</b>		
 Wear Plate <b>Part No: 6E0-44323-00</b>	 Wear Plate <b>Part No: 63V-44323-00</b>	 Wear Plate <b>Part No: 682-44323-00</b>	 Wear Plate <b>Part No: 67F-44323-00</b>	
 Wear Plate <b>Part No: 6L2-44323-00</b>	 Wear Plate <b>Part No: 689-44323-00</b>	 Wear Plate <b>Part No: 676-44323-00</b>	 Wear Plate <b>Part No: 6E5-44323-00</b>	 Wear Plate <b>Part No: 694-44323-00</b>
 Wear Plate Replaces: 69P-44323-00 <b>Part No: 61N-44323-00</b>	 Wear Plate <b>Part No: 66T-44323-00</b>	 Wear Plate Replaces: 6G5-44323-00 <b>Part No: 61A-44323-00</b>	 Wear Plate <b>Part No: 663-44323-00</b>	 Wear Plate <b>Part No: 6AW-44323-00</b>
 Wear Plate <b>Part No: 6H3-44323-00</b>	 Wear Plate <b>Part No: 688-44323-00</b>	 Wear Plate <b>Part No: 68V-44323-00</b>	 Wear Plate <b>Part No: 63D-44323-00</b>	 Wear Plate <b>Part No: 655-44323-00</b>



# SOUTHSIDE MARINE COMPONENTS

	 Replaces: 69P-44322-00 <b>Part No: 61N-44322-00</b>		 <b>Part No: 63V-44322-00</b>
 <b>Part No: 67F-44322-00</b>	 <b>Part No: 676-44322-00</b>	 <b>Part No: 682-44322-00</b>	 <b>Part No: 689-44322-00</b>
 <b>Part No: 6E0-44322-02</b>	 <b>Part No: 6E5-44322-00</b>	 Replaces: 663-44322-00 <b>Part No: 6H3-44322-00</b>	 <b>Part No: 688-44322-00</b>
 <b>Part No: 6L2-44322-00</b>	 Washer <b>Part No: 90206-22M19</b>	 Washer <b>Part No: 90201-22M01</b>	 Woodruff Key 6-70 HP Replaces: 90280-03024 <b>Part No: 90280-03M03</b>
 Woodruff Key 80-100 HP <b>Part No: 90280-04M04</b>	 Woodruff Key 115 HP-Up <b>Part No: 90280-04M05</b>	 Collar V4/ V6 <b>Part No: 61A-45527-00</b>	 Water Pump Spacer <b>Part No: 61A-45538-00</b>


# SOUTHSIDE MARINE COMPONENTS

## YAMAHA GEAR CASE SEAL KITS

HP	Year	Part Number
6-8	1984 - Current	6G1-W0001-21
9.9 / 15	1983 - 95	682-W0001-21
9.9 / 15	1995 - Current	63V-W0001-21
25	1997 - 02	6J8-W0001-21
20 / 30 1 Carby	1981 - 94	689-W0001-21
20 / 25 2 Carby	1988 - Current	6L2-W0001-21
25 / 30	2001 - Current	61N-W0001-21
30 3 Cyl	1987 - Current	6J8-W0001-21
40/ 50 3 Carb	1984 - 89	6H4-W0001-21
40 2 Cylinder	1982 - 95	676-W0001-21
40 / 50 / 60	1995 - Current	63D-W0001-21
FT25/F30/F40	2003-2009	67C-W0001-22
50	1985 - 91	6H4-W0001-21
60 / 70	1984 - Current	6H3-W0001-21
F60	2002-2006	63D-W0001-21
C, P75	1994 - 99	688-W0001-21
E75	1995 - 00	688-W0001-21
F75	2003-Current	67F-W0001-21
C80	1997	688-W0001-21
F80	1999-2013	67F-W0001-21
C85	1992 - 96	688-W0001-21
CV85E	1989 - 91	688-W0001-21
90	1992 - 02	688-W0001-21
B90	1998 - 99	688-W0001-21
C90	1997 - 01	688-W0001-21
F90	2003 - Current	67F-W0001-21
F100	1999-03	67F-W0001-21
F100	2002-04	68V-W0001-21
115	1986 - Current	6E5-W0001-21
F115	2000-13	68V-W0001-21
130 TRP	1986 - Current	6E5-W0001-21
150	1984-97, 2000-13	6G5-W0001-21
175, 200	1984-95, 2000-13	6G5-W0001-21
225	1984 - 96	6G5-W0001-21
225	96-98, 00-06	61A-W0001-21
250	90-95, 01-03	61A-W0001-21



Gear Case Seal Kit  
Replaces: 6N0-W0001-21  
**Part No: 6G1-W0001-21**




Gear Case Seal Kit  
**Part No: 682-W0001-21**




Gear Case Seal Kit  
**Part No: 63V-W0001-21**



Gear Case Seal Kit  
**Part No: 67F-W0001-21**



Gear Case Seal Kit  
**Part No: 6J8-W0001-21**



Gear Case Seal Kit  
**Part No: 689-W0001-21**



Gear Case Seal Kit  
**Part No: 6L2-W0001-21**

# SOUTHSIDE MARINE COMPONENTS



Gear Case Seal Kit  
**Part No: 61N-W0001-21**



Gear Case Seal Kit  
**Part No: 6H4-W0001-21**



679-44316-A0 Sold Separately

Gear Case Seal Kit  
**Part No: 676-W0001-21**



Gear Case Seal Kit  
Replaces: 69W-W0001-20  
**Part No: 63D-W0001-21**



Gear Case Seal Kit  
**Part No: 67C-W0001-22**



Gear Case Seal Kit  
**Part No: 6H3-W0001-21**




Gear Case Seal Kit  
**Part No: 688-W0001-21**




Gear Case Seal Kit  
**Part No: 6E5-W0001-21**



Gear Case Seal Kit  
**Part No: 6G5-W0001-21**



Gear Case Seal Kit  
Replaces: 65L-W0001-CO  
**Part No: 61A-W0001-21**



Gear Case Seal Kit  
**Part No: 68V-W0001-21**



Yamaha Gearbox  
Drain Washer 5 Pack  
Replaces: 90430-08020  
**Part No: YSG-14090-90**

# SOUTHSIDE MARINE COMPONENTS

## COVER NUTS



Cover Nut  
20-30 HP

**Part No: 664-45384-02**



Cover Nut  
40-50 HP

**Part No: 697-45384-00**



Cover Nut  
60-90 HP and V4 2 St  
80-115 HP 4-Stroke

**Part No: 688-45384-00**



Cover Nut  
V6

**Part No: 6G5-45384-00**

## YAMAHA PROP COMPONENTS



20mm Length  
Smaller Motors

Cotter Pin

**Part No:  
91490-30020**



Cotter Pin

**Part No:  
91490-30030**



Nut

**Part No:  
90171-16011**



Spacer

**Part No: 66T-45997-00**

Fits Models: F30 HP (2001-05), F40 HP (2000-05), F50 HP (2001, 2003, 2005), F60 HP (2002-05)



Nut

**Part No: 90171-16011**

Fits Models: F50 HP (2002, 2004), F75 HP (2003-05), F80 HP (1999-03), F90 HP (2003-05),  
F100 HP (1999-02), FT 80 HP (2003), T50 HP (2001-05), T60 HP (2003-05),  
60 HP (2004-05), 70 HP (2004-05), 90 HP (2004-05)



Cotter Pin

**Part No:  
91490-30030**



Cotter Pin

**Part No:  
91490-30030**



Nut

**Part No:  
90171-14013**



Washer

**Part No:  
92990-14200**



Spacer

**Part No:  
689-45997-00**

Fits Models: C25 HP (1991-97), C30 HP (1991-97), CV25 HP (1990), CV30 HP (1989-90),  
F25 HP (1989-2005), 25 HP (1984-2005), 30 HP (1984-87, 1989-93, 1996-99, 2001-02)

# SOUTHSIDE MARINE COMPONENTS

## YAMAHA PROP COMPONENTS



Cotter Pin

**Part No: 91490-40030**



Nut

**Part No: 90171-18M04**



Washer

**Part No: 92990-18200**



Spacer

**Part No: 688-45997-01**

Fits Models: B-115HP (1998-99), C-115HP (1991-00), C-150HP (1996, 1998-99), D-150HP (1997-99), DX-150HP (1999-05), F-115HP (2000-05), F-150HP (2004-05), F-200HP (2002-05), F-225HP (2002-05), F-250HP (2005), L-115HP (1998), L-130HP (1989-01), L-150HP (1986-99), L-200HP (1986-99), L-225HP (1994-99), L-250HP (1990-99), LF-115HP (2000-05), LF-150HP (2004-05), LF-200HP (2002-05), LF-225HP (2002-05), LF-250HP (2005), LX-150HP (1999-01), LX-200HP (1999-01), LX-225HP (2000-03), LX-250HP (2000-03), LZ-150HP (2000-05), LZ-200HP (2000-05), LZ-250HP (2003-05), LZ-300HP (2004-05), P-115HP (1993-96), P-150HP (1991-99), P-175HP (1994-99), P-200HP (1991-99), PW-150HP (1998), PX-150HP (1999), S-115HP (1996-99), S-130HP (1996-1999), S-150HP (1996-99), S-175HP (1996-99), S-200HP (1996-99), S-225HP (1996-99), S-250HP (1996-99), SX-150HP (1999-04), SX-200HP (1999-05), SX-225HP (2000-03), SX-250HP (2000-03), V-150HP (2000-05), V-175HP (2000), V-200HP (1989-99), V-225HP (1989-99), VX-150HP (2000-01, 2003-04), VX-200HP (2000-05), VX-225HP (2000-04), VX-250HP (2002-04), VX-300HP (2004), VZ-150HP (2000-03, 2005), VZ-175HP (2001-03, 2005), VZ-200HP (2001-03, 2005), VZ-225HP (2003, 2005), VZ-250HP (2003, 2005), VZ-300HP (2005), Z-150HP (2000-05), Z-175HP (2001-05), Z-200HP (2000-05), Z-250HP (2003-05), Z-300HP (2004-05), 115HP (1984-05), 130HP (1988-04), 150HP (1985-01, 2003-05), 175HP (1985-95, 1997, 2000), 200HP (1984-98), 225HP (1990-97), 250HP (1990-92, 1994-95)



Cotter Pin

**Part No:  
91490-40030**



Nut

**Part No:  
90171-16011**



Washer

**Part No:  
90201-17M00**



Spacer

**Part No:  
688-45997-01**

Fits Models: B-90HP (1989-99), C-60HP (1996-01), C-70HP (2000-01), C-75HP (1994-96, 1998-99), C-80HP (1997), C-85HP (1991-96), C-90HP (1997-01), CV-85HP (1989-90), E-60HP (1995-00), E-75HP (1995-00), P-60HP (1991-99), P-75HP (1996-99), S-75HP (1996), T-50HP (1996-00), 60HP (2001-03), 70HP (1984-03), 90HP (1984-03)



Cotter Pin's

**Part No: 91490-30040  
Part No: 91490-40030**



Cotter Pin

**Part No: 91490-30030**



Nut

**Part No: 90171-16011**



Spacer


**Part No: 670-45997-00**

Fits Models: C-40HP (1991-93, 1995-02), C-50HP (1998-01), C-55HP (1991-95), CV-40HP (1990), CV-55HP (1989), E-48HP (1995, 1997-00), F-40HP (1999), F-50HP (1996-00), P-40HP (1998), P-50HP (1991-96), 40HP (1984-85), 50HP (1986-97, 1999-05)



# SOUTHSIDE MARINE COMPONENTS

## YAMAHA THROTTLE CABLES

PART NO:	APPLICATION
6L2-26301-00	9.9-25 HP
676-26311-00	40A HP 2 Cylinder
689-26311-03	6-8 HP, (20CM, MHU) 25D, (30A 3 Cyl)
61N-26311-00	25-30 CV 2 Cyl
Joint Link <b>Part No: 6H1-41237-00</b> (Replaces: 662-41237-01) 	

## PROP NUTS

PART NO:	APPLICATION
90171-10M01	6-15 HP
90171-14013	25 HP
90171-16011	40-50 HP
90171-18M04	V4-V6

## THRUST WASHER (SPACER)

66T-45997-00
663-45987-00
670-45997-00
688-45987-01
688-45997-01
689-45997-00


# SOUTHSIDE MARINE COMPONENTS



7/8" O.D. x 12-1/2"  
**Part No: STT-1**



7/8" x 14 Pitch Stainless Steel  
Lock Nut  
**Part No: SLN-1**

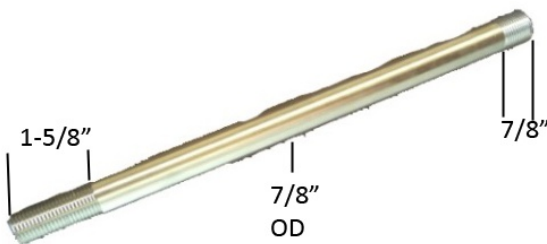


7/8" O.D. x 12-7/8"  
**Part No: STT-4**



7/8" x 14 Pitch  
Stainless Steel Jam Nut  
**Part No: SLN-3**




1.0" O.D. x 12-1/16"  
**Part No: STT-2**



7/8" Tilt Tube Thrust Washer  
**Part No: VTT-WST**



Yamaha Tilt Tube Bushing 1.0"  
Replaces: 90386-25M31-00  
**Part No: VTT-BY**



OMC Tilt Tube Thrust Washer  
**Part No: VTT-TW**

# SOUTHSIDE MARINE COMPONENTS

## Yamaha Identification Letter

Letter	Year
Q	1982
P	1983
L	1984
K	1985
J	1986
H	1987
G	1988
F	1989
D	1990
C	1991
B	1992
A	1993
Z	1994
Y	1995
X	1996
W	1997
V	1998
U	1999
T	2000
S	2001
R	2002
Q	2003
P	2004
N	2005
K	2006
J	2007
H	2008
G	2009
F	2010
D	2011
C	2012
B	2013
A	2014/2015
Z	2016

To identify the correct year, refer to the letter found in the bottom right hand corner of the ID Tag on the motor. **Note: This table is for AUSTRALIAN motors only**

## YAMAHA

<b>B111</b>		<b>PMDD</b> <b>12 Volt</b>  <b>CCW</b> <b>9 Tooth / 29mm</b> <b>87mm casing</b> <b>Drive gear: 5008</b>	Suits: F25A 4 stroke from 1998 - 2009  Yamaha: 65W-81800-00, 65W-81800-01, 65W-81800-02, 65W-81800-03
<b>B114</b>		<b>PMDD</b> <b>12 Volt</b>  <b>CCW</b> <b>9 Tooth / 29mm</b> <b>102mm casing</b> <b>Drive gear: 5008</b>	Suits: F30A, F40B 4 stroke from 2000 - 2009  Yamaha: 67C-81800-00, 67C-81800-01, 67C-81800-02
<b>B132</b>		<b>PMDD</b> <b>12 Volt</b>  <b>CCW</b> <b>9 Tooth / 29mm</b>  <b>Drive gear: 5008</b>	Suits: 2 cyl 40hp 2 stroke Enduro/CV from 1998 -2015  Yamaha: 66T-81800-01, 66T-81800-04
<b>B182</b>		<b>PMDD</b> <b>12 Volt</b>  <b>CCW</b> <b>9 Tooth</b>	Suits: FT9.9D 4 stroke from 2004 - 2007 F15A 4 stroke from 2000 - 2008  Yamaha: 66M-81800-01, 66M-81800-02
<b>HIT31</b>		<b>PMDD</b> <b>12 Volt</b>  <b>CCW</b> <b>9 Tooth</b>	Suits: 115hp – 200hp 2 stroke from 1984 - 1996 F50 4 stroke from 1995 - 2002 <b>NOTE: OEM Hitachi unit also available. See S114-323C</b> Hitachi: S114-323, S114-323A, S114-323B, S114-323C Yamaha: 6E5-81800-10, 6E5-81800-11, 6E5-81800-12
<b>HIT85</b>		<b>PMDD</b> <b>12 Volt</b>  <b>CCW</b> <b>11 Tooth / 33.5mm</b>  <b>Drive gear: 5022</b>	Suits: 2 cyl 25hp - 30hp 2 stroke from 1984 - 2018 2 cyl 40hp 2 stroke from 1990 - 1997  Hitachi: S108-80, S108-80A, S108-80B Yamaha: 689-81800-11, 689-81800-12, 689-81800-13
<b>HIT86</b>		<b>PMDD</b> <b>12 Volt</b>  <b>CCW</b> <b>9 Tooth / 29mm</b>  <b>Drive gear: 5020</b>	Suits: 3 cyl 60hp – 70hp 2 stroke from 1984 - 2010  Hitachi: S108-97, S108-97A Yamaha: 6H3-81800-10, 6H3-81800-11
<b>HIT87</b>		<b>PMDD</b> <b>12 Volt</b>  <b>CCW</b> <b>9 Tooth</b>	Suits: 55hp 2 stroke from 1991 - 1995  Hitachi: S114-220, S114-221, E,F,G,H,J Yamaha: 676-81800-10, 697-81800-10, 697-81800-11, 697-81800-12, 697-81800-13



## YAMAHA

HIT88		<b>PMDD</b> <b>12 Volt</b>  <b>CCW</b> <b>9 Tooth / 29mm</b>  <b>Drive gear: 5021</b>	Suits: 115hp – 200hp 2 stroke from 1991 - 2010  <b>NOTE: OEM Hitachi unit also available. See S114-660B</b> Hitachi: S114-552, S114-552A, S114-660, S114-660A, B Yamaha: 6K7-81800-10, 6N7-81800-00, 6N7-81800-01, 6N7-81800-10
HIT120		<b>PMDD</b> <b>12 Volt</b>  <b>CCW</b> <b>9 Tooth</b>	Suits: F50, F60 from 2003-2004 FT50, FT60 from 2003-2004  Hitachi: S114-682 Yamaha: 69W-81800-00
HIT121		<b>PMGR</b> <b>12 Volt</b>  <b>CCW</b> <b>13 Tooth</b>	Suits: F200, F225, FL200, FL225 from 2002-2011  Hitachi: S114-860 Yamaha: 69J-81800-00
HIT122		<b>PMGR</b> <b>12 Volt</b>  <b>CCW</b> <b>13 Tooth</b>	Suits: F150, FL150, F225, F250, FL250 from 2004-2011  Hitachi: S114-867, S114-867A, S114-867B Yamaha: 63P-81800-00, 6BR-81800-00, 6BR-81800-01
HIT123		<b>PMGR</b> <b>12 Volt</b>  <b>CCW</b> <b>13 Tooth</b>	Suits: LZ250 from 2003-2006 Z300, LZ300 for 2004  Hitachi: S114-863A Yamaha: 60V-81800-00, 60X-81800-00, 6D0-81800-00
HIT125		<b>PMGR</b> <b>12 Volt</b>  <b>CCW</b> <b>11 Tooth / 33.5mm</b>  <b>Drive gear: 5022</b>	Suits: F15C from 2008 up F20B from 2008 up  Hitachi: S108-125 Yamaha: 6AH-81800-00
HIT128		<b>PMGR</b> <b>12 Volt</b>  <b>CCW</b> <b>13 Tooth</b>	Suits: F80A from 2000 - 2007, F100A from 1999 - 2007  <b>NOTE: OEM Hitachi unit also available. See S114-828C</b> Hitachi: S114-828B, S114-828C Yamaha: 67F-81800-00, 67F-81800-01, 67F-81800-02
HIT131		<b>PMDD</b> <b>12 Volt</b>  <b>CCW</b> <b>11 Tooth / 33.5mm</b>  <b>Drive gear: 5022</b>	Suits: Various 9.9hp - 50hp 2 stroke from 1987-2011 F9.9 from 2010 up  <b>NOTE: OEM Hitachi unit also available. See S108-87A</b> Hitachi: S108-123, S108-87A, S108-100A Yamaha: 68T-81800-00, 6F5-81800-10, 6F5-81800-11, 6G8-81800-11, 6J4-81800-01





## YAMAHA

HIT132		<b>PMGR</b> <b>12 Volt</b>  <b>CCW</b> <b>13 Tooth</b>	Suits: F80B, F90 from 2005 up, F100D from 2008 up F115A, FL115 from 2001 - 2012 <b>NOTE: OEM Hitachi unit also available. See S114-838B</b> Hitachi: S114-838A, S114-838B Yamaha: 68V-81800-00, 68V-81800-01, 68V-81800-02
HIT133		<b>PMGR</b> <b>12 Volt</b>  <b>CCW</b> <b>10 Tooth</b>	Suits: 9.9hp – 15hp 2 stroke from 1984 - 1997 2 cyl 25hp 2 stroke from 1988 - 1999, 2006 - 2015  Hitachi: S106-07B, D, E, F, S106-12, A, B Yamaha: 682-81800-11, 682-81800-12, 6L2-81800-11, 6L2-81800-20
HIT134		<b>PMDD</b> <b>12 Volt</b>  <b>CCW</b> <b>9 Tooth / 29mm</b>  <b>Drive gear: 5020</b>	Suits: 3 cyl 40hp – 50hp 2 stroke from 1984 - 1988  Hitachi: S108-99A Yamaha: 6H4-81800-10, 6H4-81800-11, 6H4-81800-12
HIT135		<b>DD</b> <b>12 Volt</b>  <b>CCW</b> <b>9 Tooth</b>	Suits: 3 cyl 75hp 2 stroke from 1994-1999, 85hp 2 stroke from 89 - 96 3 cyl 90hp 2 stroke from 1984 up <b>NOTE: OEM Hitachi unit also available. See S114-263B</b> Hitachi: S114-263B Yamaha: 688-81800-10, 688-81800-11, 688-81800-12
HIT136		<b>PMGR</b> <b>12 Volt</b>  <b>CCW</b> <b>13 Tooth</b>	Suits: Z150 from 2000 - 2006, Z175 from 2001 - 2006, Z200 from 2000 - 2013  Yamaha: 68F-81800-00, 68F-81800-01, 68F-81800-02
HIT137		<b>PMDD</b> <b>12 Volt</b>  <b>CCW</b> <b>9 Tooth / 29mm</b>  <b>Drive gear: 5021</b>	Suits: V200(90 deg) from 1998 up 225hp (76deg) from 1994 - 2003 250hp (76deg) from 1990 - 2003  Yamaha: 61A-81800-00, 61A-81800-01, 61H-81800-01, 69L-81800-00
HIT193		<b>PMGR</b> <b>12 Volt</b>  <b>CCW</b> <b>13 Tooth</b>	Suits: F50, F60, F70 4 stroke from 2005 - 2017  Hitachi: S114-916A Yamaha: 6C5-81800-00, 6CJ-81800-00
HIT197		<b>PMGR</b> <b>12 Volt</b>  <b>CCW</b> <b>9 Tooth</b>	Suits: F115 from 2014 up F225, F250, F300 from 2011 up 2 stroke 200hp, 225hp, 250hp VMAX from 2006 - 2013 Hitachi: S114-952A, S114-952B, S114-888A Yamaha: 6CB-81800-00, 6CE-81800-00, 6EM-81800-00



## YAMAHA

MT371		<b>PMGR</b> <b>12 Volt</b>  <b>CCW</b> <b>9 Tooth</b> <b>Mitsubishi</b>	Suits: F25 4 stroke from 2010 - 2013 F40 4 stroke from 2009 - 2015 <b>Note: This is a new genuine Mitsubishi part</b> Yamaha: 6BG-81800-00
S108-87A		<b>PMDD</b> <b>12 Volt</b>  <b>CCW</b> <b>11 Tooth / 33.5mm</b>  <b>Drive gear: 5022</b>	Suits: Various 9.9hp - 50hp 2 stroke from 1987-2011 F9.9 from 2010 up <b>NOTE: OEM Hitachi unit. For aftermarket unit, see HIT131</b> Hitachi: S108-123, S108-87A, S108-100A Yamaha: 68T-81800-00, 6F5-81800-10, 6F5-81800-11, 6G8-81800-11, 6J4-81800-01
S114-263B		<b>DD</b> <b>12 Volt</b>  <b>CCW</b> <b>9 Tooth</b>	Suits: 3 cyl 75hp 2 stroke from 1994-1999, 85hp 2 stroke from 89 - 96 3 cyl 90hp 2 stroke from 1984 up <b>NOTE: OEM Hitachi unit. For aftermarket unit, see HIT135</b> Hitachi: S114-263B Yamaha: 688-81800-10, 688-81800-11, 688-81800-12
S114-323C		<b>PMDD</b> <b>12 Volt</b>  <b>CCW</b> <b>9 Tooth</b>	Suits: 115hp - 200hp 2 stroke from 1984 - 1996 F50 4 stroke from 1995 - 2002 <b>NOTE: OEM Hitachi unit. For aftermarket unit, see HIT31</b> Hitachi: S114-323, S114-323A, S114-323B, S114-323C Yamaha: 6E5-81800-10, 6E5-81800-11, 6E5-81800-12
S114-660B		<b>PMDD</b> <b>12 Volt</b>  <b>CCW</b> <b>9 Tooth / 29mm</b>  <b>Drive gear: 5021</b>	Suits: 115hp - 200hp 2 stroke from 1991 - 2010 <b>NOTE: OEM Hitachi unit. For aftermarket unit, see HIT88</b> Hitachi: S114-552, S114-552A, S114-660, S114-660A, B Yamaha: 6K7-81800-10, 6N7-81800-00, 6N7-81800-01, 6N7-81800-10
S114-828C		<b>PMGR</b> <b>12 Volt</b>  <b>CCW</b> <b>13 Tooth</b>	Suits: F80A from 2000 - 2007, F100A from 1999 - 2007 <b>Note: OEM Hitachi unit. For aftermarket unit, see HIT128</b> Hitachi: S114-828B, S114-828C Yamaha: 67F-81800-00, 67F-81800-01, 67F-81800-02
S114-838B		<b>PMGR</b> <b>12 Volt</b>  <b>CCW</b> <b>13 Tooth</b>	Suits: F80B, F90 from 2005 up, F100D from 2008 up F115A, FL115 from 2001 - 2012 <b>Note: OEM Hitachi unit. For aftermarket unit, see HIT132</b> Hitachi: S114-838A, S114-838B Yamaha: 68V-81800-00, 68V-81800-01, 68V-81800-02
CNV03		<b>12 Volt</b>  <b>Electric start</b> <b>Conversion kit</b>	Suits: 2 Stroke 25/30hp single carb/CV models from 1998 up (engine prefix 61R, 61RK, 69X, 61T, 61TK) <b>NOTE: Kit includes starter and bracket, flywheel, solenoid, rectifier, neutral safety switch, battery leads, bolts, installation manual.</b>



## YAMAHA

CNV04		12 Volt Electric start Conversion kit	Suits: 2 Stroke 40hp 2 cyl Enduro/CV models from 1998 up (engine prefix 66T, 66TK) <b>NOTE: Kit includes starter, flywheel, solenoid, rectifier, brackets neutral safety switch, battery leads, bolts, installation manual.</b>
CNV05		12 Volt Electric start Conversion kit	Suits: 2 Stroke 40/50hp 3 cyl from 1993 up (engine prefix 6H4, 6H5) <b>NOTE: Kit includes starter and bracket, flywheel, solenoid, rectifier, neutral safety switch, battery leads, bolts, installation manual.</b> <b>NOTE: A \$200 refundable deposit is charged until return of old flywheel.</b>
CNV06		12 Volt Electric start Conversion kit	Suits: 2 Stroke 20/25hp twin carb from 1994 up (engine prefix 6L2, 6L2K, 6L3) <b>NOTE: Kit includes starter, flywheel, solenoid and bracket, rectifier, neutral safety switch, battery leads, bolts, installation manual.</b> <b>NOTE: A \$200 refundable deposit is charged until return of old flywheel.</b>
CNV07		12 Volt Electric start Conversion kit	Suits: 2 Stroke 30hp 3 cyl from 1998 up (engine prefix 6J8, 6J8K) <b>NOTE: Kit includes starter and bracket, flywheel, solenoid, rectifier, neutral safety switch, battery leads, bolts, installation manual.</b> <b>NOTE: A \$200 refundable deposit is charged until return of old flywheel.</b>
CNV08		12 Volt Electric start Conversion kit <b>AVAIL. AUG 2018</b>	Suits: F25 4 stroke from 1998 - 2009 (engine prefix 65W) <b>NOTE: Kit includes starter and bracket, flywheel, solenoid, rectifier, neutral safety switch, battery leads, bolts, installation manual.</b>
CNV09		12 Volt Electric start Conversion kit <b>AVAIL. AUG 2018</b>	Suits: F15 4 stroke from 2000 - 2008, FT9.9 4 stroke from 1999 - 2008 (engine prefix 66M, 66MK, 66R, 66RK) <b>NOTE: Kit includes starter and bracket, flywheel, solenoid, rectifier, neutral safety switch, battery leads, bolts, installation manual.</b>
TRM10		12 Volt 2 Wire 3 hole	Suits: 115hp - 200hp 2 stroke from 1987 - 1995  Yamaha: 6G5-43880-02
TRM25		12 Volt 2 Wire 3 hole	Suits: 40hp 2 stroke 1994 only, 50hp 2 stroke 1992 - 1994, 55hp 2 stroke from 1994 - 1995 60hp - 90hp 2 stroke from 1992 up  Yamaha: 6H1-43880-02



## YAMAHA

TRM28		12 Volt 2 Wire 3 hole	Suits: F150 from 2010 up  Yamaha: 63P-43880-10
TRM37		12 Volt 2 wire + harness 3 hole	Suits: 60hp 2 stroke 1991 only, 70hp 2 stroke from 1987 - 1991, 85hp 2 stroke from 1990 - 1991, 90hp 2 stroke from 1987 - 1991 Note: Armature blade 4mm thick, 70.5mm flange diameter Includes 3 wire conversion harness Yamaha: 6H1-43880-00
TRM44		12 Volt 4 wire 3 hole	Suits: 225hp 2 stroke from 1995 - 2003 250hp 2 stroke from 1990 - 2003  Yamaha: 61A-43880-01, 61A-43880-02
TRM53		12 Volt 2 wire + harness 3 hole	Suits: 50hp - 200hp from 1985-1986  Note: Armature blade 4mm thick, 68.3mm flange diameter Includes 3 wire conversion harness Yamaha: 688-43880-11, 6E5-43880-01, 6E5-81800-02
TRM59		12 Volt 2 wire 4 hole	Suits: 40hp 2 stroke from 1985 - 1997 50hp 2 stroke from 1984 -1985  Yamaha: 6H5-43880-02
TRM60		12 Volt 2 Wire 3 hole	Suits: 40hp - 50hp 2 stroke from 1995 - 2002 F40 4 stroke 1999 only F50 4 stroke from 1995 - 2002  Yamaha: 62X-43880-00, 62X-43880-01, 62X-43880-09
TRM69		12 Volt 2 wire 4 hole	Suits: 115hp -225hp 2 stroke from 97 on F115 4 stroke from 2000 on F150 4 stroke from 2004 - 2009 Yamaha: 64E-43880-00, 64E-43880-01, 64E-43880-03, 67H-43880-00, 67H-43880-01, 68V-43880-00, 68V-43880-01, 68V-43880-03
TRM71		12 volt 2 wire 3 hole	Suits: 4 stroke F50, F60 from 2002-2005, F70 from 2006 on 2 stroke 40hp, 50hp from 2003-2014 <b>Note: 60mm flange diameter and 37mm shaft</b>  Yamaha: 69W-43880-00, 69W-43880-09, 62Y-43880-01, 62Y-43880-02, CS3-43880-00



## YAMAHA

TRM82		12 volt 2 wire 3 hole	Suits: 4 stroke F200, F225, F250 from 2002 - 2009 4 stroke LF200, LF225, LF250 from 2002 - 2009 LZ250, Z250, LZ300, Z300 from 2002 - 2009  Yamaha: 69J-43880-00, 60V-43880-00
TRM83		12 volt 2 wire 3 hole	Suits: 4 stroke F50, F60 from 2005 - 2015  <b>Note: 64.8mm flange diameter and 30mm shaft</b>  Yamaha: 6C5-43880-00, 6C5-43880-01
TRM87		12 volt 2 wire 4 hole	Suits: 4 stroke F75, F90 from 2003 - 2004 4 stroke F80, F100 from 1999 - 2003  Yamaha: 67F-43880-00
TRM92		12 volt 2 wire 4 hole	Suits: 4 stroke F75, F90 from 2005 - 2017 4 stroke F80, F100 from 2005 - 2017  Yamaha: 6D8-43880-00, 6D8-43880-01, 6D8-43880-09
TRM94		12 volt 2 wire + harness 3 hole	Suits: 115hp - 225hp from 1987 - 1991  <b>Note: Armature blade 2mm thick, 68.3mm flange diameter</b> Includes 3 wire conversion harness Yamaha: 6G5-43880-00, 6G5-43880-01
TRM100		12 volt 2 wire 4 hole 9 spline shaft	Suits: F25 4 stroke from 1998 -2014, T25 2 stroke from 2001-2006 F30 4 stroke from 2001-2017 F40 4 stroke from 2001-2017  Yamaha: 67C-43880-00, 65W-43880-10
TRM108		12 volt 2 wire 2 hole	Suits: F300, F350 from 2008 up  Yamaha: 6AW-43880-00, 6AW-43880-01
6008		Start relay 12 Volt	Suits: Most 9.9hp - 90hp 2 strokes from 1985 on F50 - F60 4 stroke up to 2004 F9.9 from 2005 on, F15 from 1998 on  Yamaha: 6G1-81941-10, 6G1-81940-00, 6G1-8194A-10





## YAMAHA

6009		<b>Start relay 12 Volt</b>	Suits: F50 - F90 4 strokes from 2005 on F115 from 2000 on, F200 - F225 from 2002 on 150hp-300hp HPDI from 2004 on  Yamaha: 68V-8194A-00, 68T-81940-00
6018		<b>Start relay 12 Volt</b>	Suits: Yamaha 115hp-250hp 2 stroke from 1984 - 2004  Yamaha: 6E5-81941-11, 61A-81941-00
6019		<b>Start relay 12 Volt</b>	Suits: 60hp - 70hp 2 strokes from 1991 - 2015  Yamaha: 688-81950-10
6021		<b>Start relay 12 Volt 4 Terminal isolated base</b>	Suits: F25 from 1998 - 2009 F30, F40 from 2000 - 2009  Yamaha: 65W-81941-00, 65W-81941-01
6024		<b>Trim UP relay 12 Volt 3 Terminal Blue wire</b>	Suits: F75, F80, F90, F100 from 99 - 04 115hp - 200hp 2 stroke from 1991 up  Yamaha: 6E5-8195B-01, 6E5-81950-01
6025		<b>Trim DOWN relay 12 Volt 3 Terminal Green wire</b>	Suits: F75, F80, F90, F100 from 99 - 04 115hp - 250hp 2 stroke from 1991 up  Yamaha: 6E5-8195C-01, 6E5-8195A-01
6130		<b>Starter Solenoid 12 Volt</b>	Suits: 4 Stroke starters 50hp - 300hp  <b>NOTE: Designed as a universal fit for most 4 stroke models. Suits HIT121, HIT122, HIT123, HIT128, HIT132, HIT136, HIT193, HIT197</b> Yamaha: 6C5-81941-00, 68V-81941-01, 63P-81941-00, 68F-81941-01, 69J-81941-00, 6C9-81941-00
9200		<b>Trim relay 12 Volt</b>	Used as a replacement for Yamaha trim relay assembly  Also adapts 2 wire trim motors to 3 wire trim systems.  <b>Note: includes Harness, 2 x 20A/30A relays and a 30A blade fuse.</b>



## YAMAHA

9300		<b>Trim relay 12 Volt</b>  <b>3 pin plug</b>	Suits: F25 from 98 up. 2 stroke 60hp, 70hp, 90hp, 225hp, 250hp from 95 up  Yamaha: 61A-81950-00
9301		<b>Trim relay 12 Volt</b>  <b>2 pin plug</b>	Suits: Most 4 stroke 25hp - 250hp from 2006 up  Yamaha: 63P-81950-00
9302		<b>Trim relay 12 Volt</b>  <b>3 wire connection</b>	Suits: 40hp, 50hp 2 stroke from 1994 up F30 from 2001 up, F40 from 98 - 05, F50 from 95 - 04, F60 from 02 - 04  Yamaha: 6H1-81950-00







**BACK TO INDEX  
SELECT HERE**




**UP**



## BRUSH SETS

1001		12 VOLT  brushes, holder, end cap set	Suits: OMC with american bosch/united tech starter  B4, B40, B62, B66, B78, B83, B109, B115
1002		12 VOLT  brushes, holder, end cap set	Suits: OMC with american bosch/united tech starter  B36, B109
1005		12 VOLT  brushes, holder, end cap set	Suits: Mercury with american bosch/united tech starter  B3, B5, B22, B115
1019		12 VOLT  brushes, holder, end cap set	Suits: Chrysler with american bosch/united tech starter  B10
1023		12 VOLT  brushes, holder, end cap set	Suits: Mercury with american bosch/ united tech starter  B11, B15, B70, B79, B81
7500		12 VOLT  brush set only	Suits: Various American Bosch models shown below.  B3, B4, B10, B11, B13, B15, B19, B21, B22, B28, B32, B40, B51, B62 B66, B78, B79, B81, B103, B109, B114, B115, B117, B129

## DRIVE COMPONENTS








5001		<b>Drive Bendix</b>  <b>CCW</b> <b>19 Tooth</b>	Suits: Kawasaki, Yamaha, Polaris PWC using <b>U23, U26, U35</b> starters  Kawasaki: 13101-3706 Yamaha: 6M6-8183E-00-00
5002		<b>Drive Gear</b>  <b>CCW</b> <b>8 Tooth</b> <b>OD: 27.2mm</b> <b>ID: 12.1mm</b>	Suits: various Mercury 75 - 300hp 2 stroke ( <b>B3, B15, B22, B79, B129</b> )  OMC 150 -235hp from 1977-1995 ( <b>B3</b> )  Mercury: 13310T1, 75660 OMC: 387683
5003		<b>Drive Gear</b>  <b>CCW</b> <b>9 Tooth</b> <b>OD: 35.8mm</b> <b>ID: 12.9mm</b>	Suits: OMC 20hp - 75hp ( <b>B36, B39, B40, B78, B115</b> )   OMC: 384781
5004		<b>Drive Gear</b>  <b>CCW</b> <b>9 Tooth</b> <b>OD: 36.45mm</b> <b>ID: 12.19mm</b>	Suits: OMC 20hp - 75hp ( <b>B36, B39, B40, B78, B115</b> )  <b>Note: 2 piece rubber friction clutch version</b>  OMC: 586101
5005		<b>Drive Gear</b>  <b>CCW</b> <b>10 Tooth</b> <b>OD: 32mm</b> <b>ID: 13mm</b>	Suits: OMC V4 85 - 140hp ( <b>B62, B66</b> )  Mercury outboards using B5, B11, B13, B31, B70, B170 starters  Mercury: 68575 3 OMC: 385949
5006		<b>Drive Gear</b>  <b>CCW</b> <b>10 Tooth</b> <b>OD: 32mm</b> <b>ID: 12.2mm</b>	Suits: OMC V4 85 - 140hp ( <b>B62, B66</b> ) OMC 9.9-15hp 4 stroke from 1995 - 2001 ( <b>B103</b> ) OMC 25 - 35hp 3 cyl from 1996 - 2001 ( <b>B104</b> ) <b>Note: 2 piece rubber friction clutch version</b> OMC: 586100
5007		<b>Drive Gear</b>  <b>CCW</b> <b>11 Tooth</b> <b>OD: 42.9mm</b> <b>ID: 12.9mm</b>	Suits: OMC 25-40hp starters ( <b>B109</b> )   OMC: 341648
5008		<b>Drive Gear</b>  <b>CCW</b> <b>9 Tooth</b> <b>OD: 29mm</b> <b>ID: 11.9mm</b>	Suits: Mercury 9.9hp - 40hp 4 strokes ( <b>B111, B114, B118</b> ) Yamaha 25hp - 40hp 4 strokes ( <b>B111, B114, B132</b> ) Evinrude E-TEC 15hp - 90hp from 2004 - 2012 ( <b>B147</b> )  Mercury: 68575 2, 891754T Yamaha: 65W-81807-00

## DRIVE COMPONENTS

5009		<p>Drive Gear</p> <p>CCW 10 Tooth OD: 40mm ID: 12.9mm</p>	<p>Suits:</p> <p>Chrysler 20hp - 35hp from 1972 - 1984 <b>(B82)</b></p> <p>Force 25hp - 35hp from 1986 - 1996 <b>(B82)</b></p> <p>Chrysler: F15150</p>
5010		<p>Drive Gear</p> <p>CCW 10 Tooth OD: 23.7mm ID: 10.6mm</p>	<p>Suits:</p> <p>Mercury 2 stroke USA 8hp - 25hp from 1984 - 2003 <b>(B53)</b></p> <p>Mercury: 96562</p>
5011		<p>Drive Gear</p> <p>CCW 11 Tooth OD: 42.6mm ID: 12.9mm</p>	<p>Suits:</p> <p>Chrysler 35hp - 55hp from 1967 - 1984 <b>(B51)</b></p> <p>Force: F15182</p>
5012		<p>Drive Gear</p> <p>CW 11 Tooth OD: 29.8mm ID: 12.1mm</p>	<p>Suits:</p> <p>Mercruiser, Volvo Penta PMGR offset starter <b>(A)</b></p> <p>Delco: 10475616</p>
5013		<p>Drive Gear</p> <p>CW 11 Tooth OD: 29.3mm ID: 12.1mm</p>	<p>Suits:</p> <p>Mercruiser, Volvo Penta PMGR inline bolt starter <b>(C)</b></p> <p>Mercury: 811896</p>
5014		<p>Drive Gear</p> <p>CCW 9 Tooth OD: 28.6mm ID: 12.2mm</p>	<p>Suits:</p> <p>Mercury 35hp 1965- 69, 40hp 1978 - 83, 50hp 1965 - 75 <b>(B4)</b></p> <p>Mercury: 57380</p>
5015		<p>Drive Gear</p> <p>CCW 9 Tooth OD: 29.2mm ID: 13mm</p>	<p>Suits:</p> <p>Chrysler 70hp - 140hp from 1965 - 1984 <b>(B10)</b></p> <p>Force 70hp - 150hp from 1983 - 1997 <b>(B10)</b></p> <p>Chrysler: F15118 Force: 819222A1</p>
5016		<p>Drive Gear</p> <p>CCW 9 Tooth OD: 28.8mm ID: 12.3mm</p>	<p>Suits:</p> <p>Force 75hp - 120hp from 1998 - 1999 <b>(B28)</b></p> <p>Mercury: 820583</p>




## DRIVE COMPONENTS

5017		<b>Drive Gear</b>  <b>CCW</b> <b>10 Tooth</b> <b>OD: 31mm</b> <b>ID: 12.2mm</b>	Suits: Mercury 35hp - 40hp 2 cyl from 1980 - 1987 <b>(B83)</b>  Mercury: 43076
5018		<b>Drive Gear</b>  <b>CCW</b> <b>9 Tooth</b> <b>OD: 21.6mm</b> <b>ID: 9.7mm</b>	Suits: Mercury 115hp - 225hp from 1978 - 2005 <b>(B81)</b> Optimax 135, 150, 200, 225 from 1998 - 1999 <b>(B112)</b>  Mercury: 86177
5019		<b>Drive Gear</b>  <b>CCW</b> <b>13 Tooth</b> <b>OD: 38.1mm</b> <b>ID: 13.1mm</b>	Suits: Force 40hp - 50hp from 1992 - 1999 <b>(B21, B32)</b>  Force: 811902
5020		<b>Drive Gear</b>  <b>CCW</b> <b>9 Tooth</b> <b>OD: 28.7mm</b> <b>ID: 12.1mm</b>	Suits: Yamaha 60-70hp 2 Stroke from 1984 - 2010 <b>(HIT86)</b> Yamaha 40-50hp 2 Stroke from 1984 - 1988 <b>(HIT134)</b>  Yamaha: 6H3-81807-10
5021		<b>Drive Gear</b>  <b>CCW</b> <b>9 Tooth</b> <b>OD: 28.7mm</b> <b>ID: 12.5mm</b>	Suits: 115hp - 200hp 2 stroke from 1991 - 2010 <b>(HIT88)</b>  Yamaha: 6N7-81807-00
5022		<b>Drive Gear</b>  <b>CCW</b> <b>11 Tooth</b> <b>OD: 33.5mm</b> <b>ID: 12mm</b>	Suits: Various 9.9hp - 50hp 2 stroke from 87 - 11, F9.9 from 2010 up <b>(HIT131)</b> 2 cyl 25hp - 30hp 2 stroke from 1984 - 2018 <b>(HIT85)</b> 2 cyl 40hp 2 stroke from 1990 - 1997 <b>(HIT85)</b> F15 from 2008 up, F20 from 2008 up <b>(HIT125)</b> Yamaha: 689-81807-12
5999		<b>Stationary Gear</b>	Suits: Delco Remy PG260 gear reduction starters  Delco: 10450720

## YAMAHA MODEL DECODER (AUSTRALIAN SOLD ENGINES ONLY)

ENGINE TYPE	HP	SERIES	STARTING & STEERING	TRIM & TILT	LUBRICATION	TRANSOM LENGTH	YEAR
D = Twin props	2	A	= Remote Control(no tiller)	= No tilt or trim	O = Oil Injection	S = 15"(standard)	L = 1984
E = 2 stroke Enduro	3	B	C = Tiller handle/Remote Control	D = Gas assist		L = 20"(long)	K = 1985
F = Four Stroke	4	C	E = Electric Start	P = Power tilt		X = 25"(extra long)	J = 1986
L = Counter Rotation	5	D	H = Tiller Handle	T = Power trim & tilt		U = 30"(ultra long)	H = 1987
P = Pro Series	6	E	M = Manual Start				G = 1988
S = Saltwater Series	8	F	W = Manual & Electric Start				F = 1989
T = High Thrust	9.9	G					D = 1990
V = VMAX Series	15	H					C = 1991
Z= HPDI	20	J					B = 1992
	25	N					A = 1993
	30	P					Z = 1994
	40	U					Y = 1995
	50	V					X = 1996
	60	X					W = 1997
	70						V = 1998
	75						U = 1999
	80						T = 2000
	90						S = 2001
	100						R = 2002
	115						Q = 2003
	130						P = 2004
	140						N = 2005
	150						M/K = 2006
	175						J = 2007
	200						H = 2008
	225						G = 2009
	250						F = 2010
	300						D = 2011
	350						C = 2012
							B = 2013
							A = 2014
							Z = 2015
							Y = 2016
							X = 2017
							W = 2018

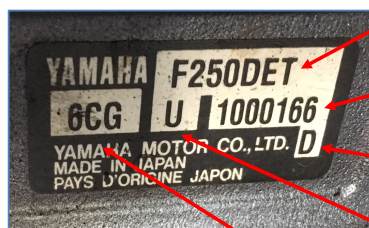

ENGINE MODEL

SERIAL NUMBER

YEAR MODEL CODE

SHAFT LENGTH

ENGINE PREFIX CODE

THE ABOVE EXAMPLE DECODES AS A FOUR STROKE, 250HP, ELECTRIC START, POWER TILT AND TRIM, ULTRA LONG SHAFT, 2011 MODEL.

MODEL	YEAR	ENGINE	OEM #	STARTER MODEL
9.9EL	90-86	9.9HP	682-81800-12	<a href="#">HIT133</a>
9.9EL	85-84	9.9HP	682-81800-11	<a href="#">HIT133</a>
9.9ELH	96-91	9.9HP	682-81800-12	<a href="#">HIT133</a>
9.9ELR	97-96	9.9HP	682-81800-12	<a href="#">HIT133</a>
9.9ES	90-86	9.9HP	682-81800-12	<a href="#">HIT133</a>
9.9ES	85-84	9.9HP	682-81800-11	<a href="#">HIT133</a>
9.9ESH	97-91	9.9HP	682-81800-12	<a href="#">HIT133</a>
9.9L	90-86	9.9HP	682-81800-12	<a href="#">HIT133</a>
9.9L	85-84	9.9HP	682-81800-11	<a href="#">HIT133</a>
9.9MLH	97-91	9.9HP	682-81800-12	<a href="#">HIT133</a>
9.9MSH	97-91	9.9HP	682-81800-12	<a href="#">HIT133</a>
9.9S	90-86	9.9HP	682-81800-12	<a href="#">HIT133</a>
9.9S	85-84	9.9HP	682-81800-11	<a href="#">HIT133</a>
15EL	90-86	15HP	682-81800-12	<a href="#">HIT133</a>
15EL	85-84	15HP	682-81800-11	<a href="#">HIT133</a>
15ELH	97-91	15HP	682-81800-12	<a href="#">HIT133</a>
15ES	90-86	15HP	682-81800-12	<a href="#">HIT133</a>
15ES	85-84	15HP	682-81800-11	<a href="#">HIT133</a>
15ESH	97-91	15HP	682-81800-12	<a href="#">HIT133</a>
15L	90-86	15HP	682-81800-12	<a href="#">HIT133</a>
15L	85-84	15HP	682-81800-11	<a href="#">HIT133</a>
15MLH	97-91	15HP	682-81800-12	<a href="#">HIT133</a>
15MSH	97-91	15HP	682-81800-12	<a href="#">HIT133</a>
15S	90-86	15HP	682-81800-12	<a href="#">HIT133</a>
15S	85-84	15HP	682-81800-11	<a href="#">HIT133</a>
20MLH	97-96	20HP	6L2-81800-11	<a href="#">HIT125</a>
20MSH	97-96	20HP	6L2-81800-11	<a href="#">HIT125</a>
25EL	90-88	25HP	6L2-81800-11	<a href="#">HIT125</a>
25EL	85-84	25HP	689-81800-13	<a href="#">HIT85</a>
25ELH	98-91	25HP	6L2-81800-11	<a href="#">HIT125</a>
25ELR	98-91	25HP	6L2-81800-11	<a href="#">HIT125</a>
25ES	90-88	25HP	6L2-81800-11	<a href="#">HIT125</a>
25ES	85-84	25HP	689-81800-13	<a href="#">HIT85</a>
25ESH	98-91	25HP	6L2-81800-11	<a href="#">HIT125</a>
25L	90-88	25HP	6L2-81800-11	<a href="#">HIT125</a>
25L	85-84	25HP	689-81800-13	<a href="#">HIT85</a>
25MHZ	2001	25HP	6F5-81800-11	<a href="#">HIT131</a>
25MLH	99	25HP	6F5-81800-11	<a href="#">HIT131</a>
25MLH	98-91	25HP	6L2-81800-11	<a href="#">HIT125</a>
25MSH	99	25HP	6F5-81800-11	<a href="#">HIT131</a>
25MSH	98-91	25HP	6L2-81800-11	<a href="#">HIT125</a>
25S	90-88	25HP	6L2-81800-11	<a href="#">HIT125</a>
25S	85-84	25HP	689-81800-13	<a href="#">HIT85</a>
30EH	99	30EH	6F5-81800-11	<a href="#">HIT131</a>
30EL	90-87	30HP	6J4-81800-01	<a href="#">HIT131</a>
30EL	86-84	30HP	689-81800-13	<a href="#">HIT85</a>



30ELH	01-96	30HP	6F5-81800-11	<a href="#">HIT131</a>
30ELR	01-96	30HP	6F5-81800-11	<a href="#">HIT131</a>
30ELR	93-91	30HP	6J4-81800-01	<a href="#">HIT131</a>
30ER	99	30ER	6F5-81800-11	<a href="#">HIT131</a>
30ES	90-87	30HP	6J4-81800-01	<a href="#">HIT131</a>
30ES	86-84	30HP	689-81800-13	<a href="#">HIT85</a>
30ESR	98-96	30HP	6F5-81800-11	<a href="#">HIT131</a>
30ESR	93-91	30HP	6J4-81800-01	<a href="#">HIT131</a>
30L	90-87	30HP	6J4-81800-01	<a href="#">HIT131</a>
30MH	99	30HP	6F5-81800-11	<a href="#">HIT131</a>
30MLH	01-96	30HP	6F5-81800-11	<a href="#">HIT131</a>
30MLH	93-91	30HP	6J4-81800-01	<a href="#">HIT131</a>
30MSH	02-96	30HP	6F5-81800-11	<a href="#">HIT131</a>
30MSH	93-91	30HP	6J4-81800-01	<a href="#">HIT131</a>
30S	90-87	30HP	6J4-81800-01	<a href="#">HIT131</a>
40EJR	99-91	40HP	6F5-81800-11	<a href="#">HIT131</a>
40EL	90-89	40HP	6J4-81800-01	<a href="#">HIT131</a>
40EL	86-84	40HP	6H4-81800-12	<a href="#">HIT134</a>
40ELR	98-91	40HP	6F5-81800-11	<a href="#">HIT131</a>
40ES	90-89	40HP	6J4-81800-01	<a href="#">HIT131</a>
40ES	86-84	40HP	6H4-81800-12	<a href="#">HIT134</a>
40ESR	99-91	40HP	6F5-81800-11	<a href="#">HIT131</a>
40ETL	90-89	40HP	6J4-81800-01	<a href="#">HIT131</a>
40ETL	86-85	40HP	6H4-81800-12	<a href="#">HIT134</a>
40L	90-89	40HP	6J4-81800-01	<a href="#">HIT131</a>
40L	86-84	40HP	6H4-81800-12	<a href="#">HIT134</a>
40MH	2000	40HP	6F5-81800-11	<a href="#">HIT131</a>
40MJH	01-91	40MJH	6F5-81800-11	<a href="#">HIT131</a>
40MLH	01-91	40HP	6F5-81800-11	<a href="#">HIT131</a>
40MSH	99-91	40HP	6F5-81800-11	<a href="#">HIT131</a>
40PLR	94-91	40HP	6F5-81800-11	<a href="#">HIT131</a>
40S	90-89	40HP	6J4-81800-01	<a href="#">HIT131</a>
40S	86-84	40HP	6H4-81800-12	<a href="#">HIT134</a>
40SJD	90-89	40HP	6J4-81800-01	<a href="#">HIT131</a>
40TLH	97-96	40HP	6F5-81800-11	<a href="#">HIT131</a>
40TLR	08-94	40HP	6F5-81800-11	<a href="#">HIT131</a>
50EJR	99-92	50HP	6F5-81800-11	<a href="#">HIT131</a>
50EJR	91	50HP	6J4-81800-01	<a href="#">HIT131</a>
50EL	90-89	50HP	6J4-81800-01	<a href="#">HIT131</a>
50EL	88-86	50HP	6H4-81800-12	<a href="#">HIT134</a>
50ELR	95-92	50HP	6F5-81800-11	<a href="#">HIT131</a>
50ELR	91	50HP	6J4-81800-01	<a href="#">HIT131</a>
50ER	2000	50ER	6F5-81800-11	<a href="#">HIT131</a>
50ES	90-89	50HP	6J4-81800-01	<a href="#">HIT131</a>
50ES	88-86	50HP	6H4-81800-12	<a href="#">HIT134</a>
50ESJD	90-89	50HP	6J4-81800-01	<a href="#">HIT131</a>
50ESJD	88-87	50HP	6H4-81800-12	<a href="#">HIT134</a>



50ETL	86	50HP	6H4-81800-12	<a href="#">HIT134</a>
50ETML	90	50HPP	6J4-81800-01	<a href="#">HIT131</a>
50TH	94	50TH	6F5-81800-11	<a href="#">HIT131</a>
50TLH	97-92	50HP	6F5-81800-11	<a href="#">HIT131</a>
50TLH	91	50HP	6J4-81800-01	<a href="#">HIT131</a>
50TLR	08-02	50HP	6F5-81800-11	<a href="#">HIT131</a>
50TLR	97	50HP	6F5-81800-11	<a href="#">HIT131</a>
60TLR	06-02	60HP	6H3-81800-11	<a href="#">HIT86</a>
70ETL	90-84	70HP	6H3-81800-11	<a href="#">HIT86</a>
70TLR	08-91	70HP	6H3-81800-11	<a href="#">HIT86</a>
70HP	99	70HP	6H3-81800-11	<a href="#">HIT86</a>
90ETL	90-84	90HP	688-81800-12	<a href="#">HIT135</a>
90ETLJD	90-87	90HP	688-81800-12	<a href="#">HIT135</a>
90HP	84	90HP	688-81800-12	<a href="#">HIT135</a>
90HP	01-91	90HP	688-81800-12	<a href="#">HIT135</a>
90TLR	08-91	90HP	688-81800-12	<a href="#">HIT135</a>
115ETL	90-84	115HP	6E5-81800-12	<a href="#">HIT31</a>
115ETLJD	90-87	115HP	6E5-81800-12	<a href="#">HIT31</a>
115HP	90-84	115HP	6E5-81800-12	<a href="#">HIT31</a>
115HP	99-97	115HP	6N7-81800-00	<a href="#">HIT88</a>
115HP	96-91	115HP	6E5-81800-12	<a href="#">HIT31</a>
115TLR	08-02	115HP	6N7-81800-10	<a href="#">HIT88</a>
115TLR	98-97	115HP	6N7-81800-00	<a href="#">HIT88</a>
115TLR	96-91	115HP	6E5-81800-12	<a href="#">HIT31</a>
115HP	2000	115HP	6N7-81800-10	<a href="#">HIT88</a>
115HP	08-02	115HP	6N7-81800-10	<a href="#">HIT88</a>
115HP	95-91	115HP	6E5-81800-12	<a href="#">HIT31</a>
130ETL	90-88	130HP	6E5-81800-12	<a href="#">HIT31</a>
130HP	90-88	130HP	6E5-81800-12	<a href="#">HIT31</a>
130TLR	04-02	130HP	6N7-81800-10	<a href="#">HIT88</a>
130TLR	99-97	130HP	6N7-81800-00	<a href="#">HIT88</a>
130TLR	96-91	130HP	6E5-81800-12	<a href="#">HIT31</a>
130HP	2000	130HP	6N7-81800-10	<a href="#">HIT88</a>
130HP	04-02	130HP	6N7-81800-10	<a href="#">HIT88</a>
130HP	95-91	130HP	6E5-81800-12	<a href="#">HIT31</a>
150ETL	90-85	150HP	6E5-81800-12	<a href="#">HIT31</a>
150HP	90-85	150HP	6E5-81800-12	<a href="#">HIT31</a>
150HP	99-98	150HP	6N7-81800-01	<a href="#">HIT88</a>
150HP	97	150HP	6N7-81800-00	<a href="#">HIT88</a>
150HP	96	150HP	6E5-81800-12	<a href="#">HIT31</a>
150TLR	98	150HP	6N7-81800-01	<a href="#">HIT88</a>
150TLR	97	150HP	6N7-81800-00	<a href="#">HIT88</a>
150TLR	96-91	150HP	6E5-81800-12	<a href="#">HIT31</a>
150HP	2000	150HP	6N7-81800-10	<a href="#">HIT88</a>
150HP	08-01	150HP	6N7-81800-10	<a href="#">HIT88</a>
150HP	95-91	150HP	6E5-81800-12	<a href="#">HIT31</a>
175ETL	90-85	175HP	6E5-81800-12	<a href="#">HIT31</a>





175HP	90-85	175HP	6E5-81800-12	<a href="#">HIT31</a>
175TLR	98	175HP	6N7-81800-01	<a href="#">HIT88</a>
175TLR	97	175HP	6N7-81800-00	<a href="#">HIT88</a>
175TLR	96-91	175HP	6E5-81800-12	<a href="#">HIT31</a>
175HP	2000	175HP	6N7-81800-10	<a href="#">HIT88</a>
175HP	95-91	175HP	6E5-81800-12	<a href="#">HIT31</a>
200ETL	90-84	200HP	6E5-81800-12	<a href="#">HIT31</a>
200ETLJD	90-89	200HP	6E5-81800-12	<a href="#">HIT31</a>
200HP	90-84	200HP	6E5-81800-12	<a href="#">HIT31</a>
200HP	95-91	200HP	6E5-81800-12	<a href="#">HIT31</a>
200TLR	98	200HP	6N7-81800-01	<a href="#">HIT88</a>
200TLR	97	200HP	6N7-81800-00	<a href="#">HIT88</a>
200TLR	96-91	200HP	6E5-81800-12	<a href="#">HIT31</a>
200HP	95-91	200HP	6E5-81800-12	<a href="#">HIT31</a>
225ETL	90	225HP	61H-81800-01	<a href="#">HIT137</a>
225HP	90	225HP	61H-81800-01	<a href="#">HIT137</a>
225TLR	97	225HP	6N7-81800-00	<a href="#">HIT88</a>
225TLR	96-94	225HP	61A-81800-01	<a href="#">HIT137</a>
225TLR	93-91	225HP	61H-81800-01	<a href="#">HIT137</a>
225HP	95	225HP	61A-81800-01	<a href="#">HIT137</a>
225HP	95-94	225HP	61A-81800-01	<a href="#">HIT137</a>
225HP	93-91	225HP	61H-81800-01	<a href="#">HIT137</a>
250HP	90	250HP	61A-81800-01	<a href="#">HIT137</a>
250HP	95-91	250HP	61A-81800-01	<a href="#">HIT137</a>
250HP	95-91	250HP	61A-81800-01	<a href="#">HIT137</a>
B90TLR	99-98	90HP	688-81800-12	<a href="#">HIT135</a>
B115TLR	99-98	115HP	6N7-81800-01	<a href="#">HIT88</a>
C25ELH	97-93	25HP	689-81800-13	<a href="#">HIT85</a>
C25ELR	97-91	25HP	689-81800-13	<a href="#">HIT85</a>
C25MLH	97-93	25HP	689-81800-13	<a href="#">HIT85</a>
C25MSH	97-93	25HP	689-81800-13	<a href="#">HIT85</a>
C30ELR	97-91	30HP	689-81800-13	<a href="#">HIT85</a>
C40ELR	97-91	40HP	689-81800-13	<a href="#">HIT85</a>
C40ESH	97	40HP	689-81800-13	<a href="#">HIT85</a>
C40MLH	95	40HP	689-81800-13	<a href="#">HIT85</a>
C40MSH	97-92	40HP	689-81800-13	<a href="#">HIT85</a>
C40PLR	97-92	40HP	689-81800-13	<a href="#">HIT85</a>
C40TLR	02-97	40HP	6F5-81800-11	<a href="#">HIT131</a>
C50TLR	01-98	50HP	6F5-81800-11	<a href="#">HIT131</a>
C55ELR	95-91	55HP	697-81800-12	<a href="#">HIT87</a>
C55TLR	95-93	55HP	697-81800-12	<a href="#">HIT87</a>
C60TLR	01-96	60HP	6H3-81800-11	<a href="#">HIT86</a>
C70TLR	01-00	70HP	6H3-81800-11	<a href="#">HIT86</a>
C75TLR	99-94	75HP	688-81800-12	<a href="#">HIT135</a>
C80TLR	97	80HP	688-81800-12	<a href="#">HIT135</a>
C85TLR	96-91	85HP	688-81800-12	<a href="#">HIT135</a>
C90TLR	01-97	90HP	688-81800-12	<a href="#">HIT135</a>



C115TLR	99-98	115HP	6N7-81800-01	<a href="#">HIT88</a>
C115TLR	97	115HP	6N7-81800-00	<a href="#">HIT88</a>
C115TLR	96-91	115HP	6E5-81800-12	<a href="#">HIT31</a>
C115HP	2000	115HP	6N7-81800-10	<a href="#">HIT88</a>
C115HP	99-98	115HP	6N7-81800-01	<a href="#">HIT88</a>
C115HP	97	115HP	6N7-81800-00	<a href="#">HIT88</a>
C115HP	96-92	115HP	6E5-81800-12	<a href="#">HIT31</a>
C150TLR	99-97	150HP	6N7-81800-00	<a href="#">HIT88</a>
C150TLR	96	150HP	6E5-81800-12	<a href="#">HIT31</a>
C150HP	99-97	150HP	6N7-81800-00	<a href="#">HIT88</a>
C150HP	96	150HP	6E5-81800-12	<a href="#">HIT31</a>
C25EL	90	25HP	689-81800-13	<a href="#">HIT85</a>
C25EML	90	25HP	689-81800-13	<a href="#">HIT85</a>
CV30EL	90	30HP	689-81800-13	<a href="#">HIT85</a>
CV40EL	90	40HP	689-81800-13	<a href="#">HIT85</a>
CV85EL	90	85HP	688-81800-12	<a href="#">HIT135</a>
CV85ETL	90	85HP	688-81800-12	<a href="#">HIT135</a>
D150TLR	99-97	150HP	6N7-81800-00	<a href="#">HIT88</a>
DX150TLR	05-99	150HP	6N7-81800-10	<a href="#">HIT88</a>
F9.9ELR	05-01	F9.9HP	6G8-81800-11	<a href="#">HIT131</a>
F9.9ELR2	08-05	F9.9HP	66M-81800-01	<a href="#">HIT127</a>
F9.9FELR	08-06	F9.9HP	68T-81800-00	<a href="#">HIT126</a>
F9.9FMLH	08-06	F9.9HP	68T-81800-00	<a href="#">HIT126</a>
F9.9FMSH	08-06	F9.9HP	68T-81800-00	<a href="#">HIT126</a>
F9.9MLH	05-99	F9.9HP	6G8-81800-11	<a href="#">HIT131</a>
F9.9MLH2	08-06	F9.9HP	66M-81800-01	<a href="#">HIT127</a>
F9.9MSH	05-99	F9.9HP	6G8-81800-11	<a href="#">HIT131</a>
F9.9MSH2	08-06	F9.9HP	66M-81800-01	<a href="#">HIT127</a>
F15EH	2000	F15HP	66M-81800-01	<a href="#">HIT127</a>
F15ELH	08-00	F15HP	66M-81800-01	<a href="#">HIT127</a>
F15ELH	99-98	F15HP	66M-81800-00	<a href="#">HIT127</a>
F15ESH	08-00	F15HP	66M-81800-01	<a href="#">HIT127</a>
F15ESH	99-98	F15HP	66M-81800-00	<a href="#">HIT127</a>
F15MH	2000	F15HP	66M-81800-01	<a href="#">HIT127</a>
F15MLH	08-01	F15HP	66M-81800-01	<a href="#">HIT127</a>
F15MLH	98	F15HP	66M-81800-00	<a href="#">HIT127</a>
F15MSH	08-01	F15HP	66M-81800-01	<a href="#">HIT127</a>
F15MSH	98	F15HP	66M-81800-00	<a href="#">HIT127</a>
F15PLH	08-01	F15HP	66M-81800-01	<a href="#">HIT127</a>
F15PLR	08-01	F15HP	66M-81800-01	<a href="#">HIT127</a>
F25EH	2000	F25EH	65W-81800-01	<a href="#">B111</a>
F25ELH	08-05	F25HP	65W-81800-02	<a href="#">B111</a>
F25ELH	04-00	F25HP	65W-81800-01	<a href="#">B111</a>
F25ELH	99-98	F25HP	65W-81800-00	<a href="#">B111</a>
F25ELR	08-05	F25HP	65W-81800-02	<a href="#">B111</a>
F25ELR	04-00	F25HP	65W-81800-01	<a href="#">B111</a>
F25ELR	99-98	F25HP	65W-81800-00	<a href="#">B111</a>



F25ESH	08-05	F25HP	65W-81800-02	<a href="#">B111</a>
F25ESH	04-00	F25HP	65W-81800-01	<a href="#">B111</a>
F25ESH	99-98	F25HP	65W-81800-00	<a href="#">B111</a>
F25ESR	08-05	F25HP	65W-81800-02	<a href="#">B111</a>
F25ESR	04-01	F25HP	65W-81800-01	<a href="#">B111</a>
F25MH	2000	F25HP	65W-81800-01	<a href="#">B111</a>
F25MLH	08-05	F25HP	65W-81800-02	<a href="#">B111</a>
F25MLH	04-00	F25HP	65W-81800-01	<a href="#">B111</a>
F25MLH	99	F25HP	65W-81800-00	<a href="#">B111</a>
F25MSH	08-05	F25HP	65W-81800-02	<a href="#">B111</a>
F25MSH	04-00	F25HP	65W-81800-01	<a href="#">B111</a>
F25MSH	99	F25HP	65W-81800-00	<a href="#">B111</a>
F25TLR	08-05	F25HP	65W-81800-02	<a href="#">B111</a>
F25TLR	04-00	F25HP	65W-81800-01	<a href="#">B111</a>
F25TLR	99-98	F25HP	65W-81800-00	<a href="#">B111</a>
F30TLR	08-05	F30HP	67C-81800-01	<a href="#">B111</a>
F30TLR	04-01	F30HP	67C-81800-00	<a href="#">B111</a>
F40BEJR	2008	F40HP	67C-81800-02	<a href="#">B111</a>
F40BMJH	2008	F40HP	67C-81800-02	<a href="#">B111</a>
F40BMLH	2008	F40HP	67C-81800-02	<a href="#">B111</a>
F40BTLR	2008	F40HP	67C-81800-02	<a href="#">B111</a>
F40EJR	07-06	F40HP	67C-81800-02	<a href="#">B111</a>
F40EJR	2005	F40HP	67C-81800-01	<a href="#">B111</a>
F40EJR	04-03	F40HP	67C-81800-00	<a href="#">B111</a>
F40ESR	04-00	F40HP	67C-81800-00	<a href="#">B111</a>
F40MH	2000	F40HP	67C-81800-00	<a href="#">B111</a>
F40MJH	07-06	F40HP	67C-81800-02	<a href="#">B111</a>
F40MJH	2005	F40HP	67C-81800-01	<a href="#">B111</a>
F40MJH	04-01	F40HP	67C-81800-00	<a href="#">B111</a>
F40MLH	07-06	F40HP	67C-81800-02	<a href="#">B111</a>
F40MLH	2005	F40HP	67C-81800-01	<a href="#">B111</a>
F40MLH	04-01	F40HP	67C-81800-00	<a href="#">B111</a>
F40MSH	07-06	F40HP	67C-81800-02	<a href="#">B111</a>
F40MSH	2005	F40HP	67C-81800-01	<a href="#">B111</a>
F40MSH	04-01	F40HP	67C-81800-00	<a href="#">B111</a>
F40TLR	07-06	F40HP	67C-81800-02	<a href="#">B111</a>
F40TLR	2005	F40HP	67C-81800-01	<a href="#">B111</a>
F40TLR	04-00	F40HP	67C-81800-00	<a href="#">B111</a>
F40TLR	99	F40HP	6E5-81800-12	<a href="#">HIT31</a>
F50HP	02-01	F50HP	6E5-81800-12	<a href="#">HIT31</a>
F50TLH	98-96	F50HP	6E5-81800-12	<a href="#">HIT31</a>
F50TLR	04-03	F50HP	69W-81800-00	<a href="#">HIT120</a>
F50TLR	02-96	F50HP	6E5-81800-12	<a href="#">HIT31</a>
F60HP	04-02	F60HP	69W-81800-00	<a href="#">HIT120</a>
F60TLR	04-02	F60HP	69W-81800-00	<a href="#">HIT120</a>
F75TLR	08-05	F75HP	68V-81800-01	<a href="#">HIT132</a>
F75TLR	04-03	F75HP	67F-81800-02	<a href="#">HIT128</a>



F80HP	02-01	F80HP	67F-81800-02	<a href="#">HIT128</a>
F80TLR	02-01	F80HP	67F-81800-02	<a href="#">HIT128</a>
F80TLR	2000	F80HP	67F-81800-01	<a href="#">HIT128</a>
F80TLR	99	F80HP	67F-81800-00	<a href="#">HIT128</a>
F90HP	04-03	F90HP	67F-81800-02	<a href="#">HIT128</a>
F90TLR	04-03	F90HP	67F-81800-02	<a href="#">HIT128</a>
F100TLR	02-01	F100HP	67F-81800-02	<a href="#">HIT128</a>
F100TLR	2000	F100HP	67F-81800-01	<a href="#">HIT128</a>
F100TLR	99	F100HP	67F-81800-00	<a href="#">HIT128</a>
F100HP	02-01	F100HP	67F-81800-02	<a href="#">HIT128</a>
F100HP	2000	F100HP	67F-81800-01	<a href="#">HIT128</a>
F100HP	99	F100HP	67F-81800-00	<a href="#">HIT128</a>
F115HP	08-01	F115HP	68V-81800-01	<a href="#">HIT132</a>
F115TLR	08-01	F115HP	68V-81800-01	<a href="#">HIT132</a>
F115TLR	2000	F115HP	68V-81800-00	<a href="#">HIT132</a>
F115HP	08-01	F115HP	68V-81800-01	<a href="#">HIT132</a>
F115HP	2000	F115HP	68V-81800-00	<a href="#">HIT132</a>
F150TLR	08-04	F150HP	63P-81800-00	<a href="#">HIT122</a>
F150HP	08-04	F150HP	63P-81800-00	<a href="#">HIT122</a>
F200HP	08-02	F200HP	69J-81800-00	<a href="#">HIT121</a>
F225TLR	08-06	F225HP	63P-81800-00	<a href="#">HIT122</a>
F225HP	08-02	F225HP	69J-81800-00	<a href="#">HIT121</a>
F225HP	08-02	F225HP	69J-81800-00	<a href="#">HIT121</a>
F9.9EL	90-85	F9.9HP	6G8-81800-11	<a href="#">HIT131</a>
F9.9ERL	90	F9.9ERHP	6G8-81800-11	<a href="#">HIT131</a>
F9.9EX	90-85	F9.9EX	6G8-81800-11	<a href="#">HIT131</a>
F9.9X	90-85	F9.9X	6G8-81800-11	<a href="#">HIT131</a>
L130HP	90-89	130HP	6E5-81800-12	<a href="#">HIT31</a>
L130HP	2000	130HP	6N7-81800-10	<a href="#">HIT88</a>
L130HP	99-97	130HP	6N7-81800-00	<a href="#">HIT88</a>
L130HP	96-91	130HP	6E5-81800-12	<a href="#">HIT31</a>
L150HP	90-86	150HP	6E5-81800-12	<a href="#">HIT31</a>
L150HP	99-98	150HP	6N7-81800-01	<a href="#">HIT88</a>
L150HP	97	150HP	6N7-81800-00	<a href="#">HIT88</a>
L150HP	96-91	150HP	6E5-81800-12	<a href="#">HIT31</a>
L200HP	90-86	200HP	6E5-81800-12	<a href="#">HIT31</a>
L200TLR	95	200HP	6E5-81800-12	<a href="#">HIT31</a>
L200HP	99-98	200HP	6N7-81800-01	<a href="#">HIT88</a>
L200HP	97	200HP	6N7-81800-00	<a href="#">HIT88</a>
L200HP	96-91	200HP	6E5-81800-12	<a href="#">HIT31</a>
L225HP	96-95	225HP	61A-81800-01	<a href="#">HIT137</a>
L225HP	99-94	225HP	61A-81800-01	<a href="#">HIT137</a>
L250HP	90	250HP	61A-81800-01	<a href="#">HIT137</a>
L250TLR	91	250HP	61A-81800-01	<a href="#">HIT137</a>
L250HP	99-92	250HP	61A-81800-01	<a href="#">HIT137</a>
L250HP	99-92	250HP	61A-81800-01	<a href="#">HIT137</a>
LF115HP	2000	115HP	68V-81800-00	<a href="#">HIT132</a>



LF115HP	08-01	115HP	68V-81800-01	<a href="#">HIT132</a>
LF150HP	08-04	150HP	63P-81800-00	<a href="#">HIT122</a>
LF200HP	08-02	200HP	69J-81800-00	<a href="#">HIT121</a>
LF225HP	06-02	225HP	69J-81800-00	<a href="#">HIT121</a>
LF225HP	98-97	225HP	61A-81800-01	<a href="#">HIT137</a>
LF225HP	08-02	225HP	69J-81800-00	<a href="#">HIT121</a>
LF225HP	98-97	225HP	61A-81800-01	<a href="#">HIT137</a>
LF250HP	08-05	250HP	63P-81800-00	<a href="#">HIT122</a>
LF250HP	08-05	250HP	63P-81800-00	<a href="#">HIT122</a>
LX150HP	01-99	150HP	6N7-81800-10	<a href="#">HIT88</a>
LX200HP	01-99	200HP	6N7-81800-10	<a href="#">HIT88</a>
LX225	2000	225	61A-81800-01	<a href="#">HIT137</a>
LX225HP	02-01	225HP	61A-81800-01	<a href="#">HIT137</a>
LX250HP	2000	250HP	61A-81800-01	<a href="#">HIT137</a>
LX250HP	02-01	250HP	61A-81800-01	<a href="#">HIT137</a>
LX250HP	02-01	250HP	61A-81800-01	<a href="#">HIT137</a>
LZ150HP	2000	150HP	68F-81800-01	<a href="#">HIT136</a>
LZ150HP	06-01	150HP	68F-81800-01	<a href="#">HIT136</a>
LZ200HP	2000	200HP	68F-81800-01	<a href="#">HIT136</a>
LZ200HP	08-01	200HP	68F-81800-01	<a href="#">HIT136</a>
LZ250HP	05-04	250HP	60X-81800-00	<a href="#">HIT123</a>
LZ250HP	2003	250HP	60V-81800-00	<a href="#">HIT123</a>
LZ250HP	05-04	250HP	60X-81800-00	<a href="#">HIT123</a>
LZ250HP	2003	250HP	60V-81800-00	<a href="#">HIT123</a>
P40EJR	98	40HP	6F5-81800-11	<a href="#">HIT131</a>
P40TLH	98	40HP	6F5-81800-11	<a href="#">HIT131</a>
P50TLR	96-93	50HP	6F5-81800-11	<a href="#">HIT131</a>
P50TLR	92-91	50HP	6J4-81800-01	<a href="#">HIT131</a>
P60TLH	99-91	60HP	6H3-81800-11	<a href="#">HIT86</a>
P75TLH	99-96	75HP	688-81800-12	<a href="#">HIT135</a>
P115TLR	96-93	115HP	6E5-81800-12	<a href="#">HIT31</a>
P150TLR	99-97	150HP	6N7-81800-00	<a href="#">HIT88</a>
P150TLR	96-91	150HP	6E5-81800-12	<a href="#">HIT31</a>
P175TLR	99-97	175HP	6N7-81800-00	<a href="#">HIT88</a>
P175TLR	96-94	175HP	6E5-81800-12	<a href="#">HIT31</a>
P200TLR	99-97	200HP	6N7-81800-00	<a href="#">HIT88</a>
P200TLR	96-91	200HP	61H-81800-01	<a href="#">HIT137</a>
PRO50L	90-88	50HP	6J4-81800-01	<a href="#">HIT131</a>
PRO50L	87	50HP	6H4-81800-12	<a href="#">HIT134</a>
PRO150L	90-86	150HP	6E5-81800-12	<a href="#">HIT31</a>
PX150TLR	99	150HP	6N7-81800-10	<a href="#">HIT88</a>
S115TLR	99-97	115HP	6N7-81800-00	<a href="#">HIT88</a>
S115TLR	96	115HP	6E5-81800-12	<a href="#">HIT31</a>
S115HP	99-97	115HP	6N7-81800-00	<a href="#">HIT88</a>
S115HP	96	115HP	6E5-81800-12	<a href="#">HIT31</a>
S130TLR	99-97	130HP	6N7-81800-00	<a href="#">HIT88</a>
S130TLR	96	130HP	6E5-81800-12	<a href="#">HIT31</a>





S130HP	99-97	130HP	6N7-81800-00	<a href="#">HIT88</a>
S130HP	96	130HP	6E5-81800-12	<a href="#">HIT31</a>
S150TLR	99-98	150HP	6N7-81800-01	<a href="#">HIT88</a>
S150TLR	97	150HP	6N7-81800-00	<a href="#">HIT88</a>
S150TLR	96	150HP	6E5-81800-12	<a href="#">HIT31</a>
S150TSR	96	150HP	6E5-81800-12	<a href="#">HIT31</a>
S150HP	99-98	150HP	6N7-81800-01	<a href="#">HIT88</a>
S150HP	97	150HP	6N7-81800-00	<a href="#">HIT88</a>
S175HP	99-98	175HP	6N7-81800-01	<a href="#">HIT88</a>
S175HP	97	175HP	6N7-81800-00	<a href="#">HIT88</a>
S175HP	96	175HP	6E5-81800-12	<a href="#">HIT31</a>
S200HP	99-98	200HP	6N7-81800-01	<a href="#">HIT88</a>
S200HP	97	200HP	6N7-81800-00	<a href="#">HIT88</a>
S200HP	96	200HP	6E5-81800-12	<a href="#">HIT31</a>
S225HP	99-96	225HP	61A-81800-01	<a href="#">HIT137</a>
S225HP	99-96	225HP	61A-81800-01	<a href="#">HIT137</a>
S250HP	97-96	250HP	61A-81800-01	<a href="#">HIT137</a>
S250HP	99-96	250HP	61A-81800-01	<a href="#">HIT137</a>
SX150TLR	99	150HP	6N7-81800-10	<a href="#">HIT88</a>
SX150HP	04-99	150HP	6N7-81800-10	<a href="#">HIT88</a>
SX200TLR	04-03	200HP	6N7-81800-10	<a href="#">HIT88</a>
SX200HP	05-01	200HP	6N7-81800-10	<a href="#">HIT88</a>
SX225HP	2000	225HP	61A-81800-01	<a href="#">HIT137</a>
SX225HP	02-01	225HP	61A-81800-01	<a href="#">HIT137</a>
SX225HP	02-01	225HP	61A-81800-01	<a href="#">HIT137</a>
SX250HP	2000	250HP	61A-81800-01	<a href="#">HIT137</a>
SX250HP	02-01	250HP	61A-81800-01	<a href="#">HIT137</a>
SX250HP	02-01	250HP	61A-81800-01	<a href="#">HIT137</a>
T8DELH	2008	8HP	68T-81800-00	<a href="#">HIT126</a>
T8DEXH	2008	8HP	68T-81800-00	<a href="#">HIT126</a>
T8DPLH	2008	8HP	68T-81800-00	<a href="#">HIT126</a>
T8DPLR	2008	8HP	68T-81800-00	<a href="#">HIT126</a>
T8DPXH	2008	8HP	68T-81800-00	<a href="#">HIT126</a>
T8DPXR	2008	8HP	68T-81800-00	<a href="#">HIT126</a>
T8ELH	07-02	8HP	68T-81800-00	<a href="#">HIT126</a>
T8EXH	07-02	8HP	68T-81800-00	<a href="#">HIT126</a>
T8PLH	07-02	8HP	68T-81800-00	<a href="#">HIT126</a>
T8PLR	07-02	8HP	68T-81800-00	<a href="#">HIT126</a>
T8PXH	07-01	8HP	68T-81800-00	<a href="#">HIT126</a>
T8PXR	07-01	8HP	68T-81800-00	<a href="#">HIT126</a>
9.9ELH	05-91	9.9HP	6G8-81800-11	<a href="#">HIT131</a>
9.9ELH2	2000	9.9HP	66M-81800-02	<a href="#">HIT127</a>
9.9ELH2	06-05	9.9HP	66M-81800-01	<a href="#">HIT127</a>
9.9ELR	05-91	9.9HP	6G8-81800-11	<a href="#">HIT131</a>
9.9ELR2	2007	9.9HP	66M-81800-02	<a href="#">HIT127</a>
9.9ELR2	06-05	9.9HP	66M-81800-01	<a href="#">HIT127</a>
9.9EXH	05-91	9.9HP	6G8-81800-11	<a href="#">HIT131</a>



9.9EXH2	2007	9.9HP	66M-81800-02	<a href="#">HIT127</a>
9.9EXH2	06-05	9.9HP	66M-81800-01	<a href="#">HIT127</a>
9.9EXR	01-97	9.9HP	6G8-81800-11	<a href="#">HIT131</a>
9.9GELH	2008	9.9HP	68T-81800-00	<a href="#">HIT126</a>
9.9GEXH	2008	9.9HP	68T-81800-00	<a href="#">HIT126</a>
9.9GPLH	2008	9.9HP	68T-81800-00	<a href="#">HIT126</a>
9.9GPLR	2008	9.9HP	68T-81800-00	<a href="#">HIT126</a>
9.9GPXH	2008	9.9HP	68T-81800-00	<a href="#">HIT126</a>
9.9GPXR	2008	9.9HP	68T-81800-00	<a href="#">HIT126</a>
9.9MLH	97-96	9.9HP	6G8-81800-11	<a href="#">HIT131</a>
9.9MXH	97-91	9.9HP	6G8-81800-11	<a href="#">HIT131</a>
25TLR	06-05	25HP	65W-81800-02	<a href="#">B111</a>
25TLR	04-01	25HP	65W-81800-01	<a href="#">B111</a>
T50TLR	04-03	50HP	69W-81800-00	<a href="#">HIT120</a>
T50TLR	02-96	50HP	6E5-81800-12	<a href="#">HIT31</a>
T60TLR	04-03	60HP	69W-81800-00	<a href="#">HIT120</a>
V6 EXCEL L	89-87	V6 HP	61H-81800-01	<a href="#">HIT137</a>
V6 EXCEL X	89-87	V6 HP	61H-81800-01	<a href="#">HIT137</a>
V6 SPECIAL	86-85	V6 HPPEIAHP	6E5-81800-12	<a href="#">HIT31</a>
150TLR	08-00	150HP	6N7-81800-10	<a href="#">HIT88</a>
175TLR	2000	175HP	6N7-81800-10	<a href="#">HIT88</a>
200TLR	99-98	200HP	61A-81800-01	<a href="#">HIT137</a>
225TLR	99-98	225HP	61A-81800-01	<a href="#">HIT137</a>
VX150TLR	04-00	150HP	6N7-81800-10	<a href="#">HIT88</a>
VX200TLR	05-04	200HP	69L-81800-00	<a href="#">HIT137</a>
VX200TLR	03-00	200HP	61A-81800-01	<a href="#">HIT137</a>
VX225TLR	04-00	225HP	61A-81800-01	<a href="#">HIT137</a>
VX250TLR	04-02	250HP	69L-81800-00	<a href="#">HIT137</a>
VZ150TLR	08-00	150HP	68F-81800-01	<a href="#">HIT136</a>
VZ175TLR	08-01	175HP	68F-81800-01	<a href="#">HIT136</a>
VZ200RTLHP	2008	200HP	60X-81800-00	<a href="#">HIT123</a>
VZ200TLR	08-05	200HP	60X-81800-00	<a href="#">HIT123</a>
VZ200TLR	04-01	200HP	68F-81800-01	<a href="#">HIT136</a>
VZ225HTLR	2008	225HP	60X-81800-00	<a href="#">HIT123</a>
VZ225TLR	07-03	225HP	60X-81800-00	<a href="#">HIT123</a>
VZ250FTLR	2008	250HP	60X-81800-00	<a href="#">HIT123</a>
VZ250TLR	07-03	250HP	60X-81800-00	<a href="#">HIT123</a>
Z150TLR	04-01	150HP	68F-81800-01	<a href="#">HIT136</a>
Z150HP	2000	150HP	68F-81800-01	<a href="#">HIT136</a>
Z150HP	06-01	150HP	68F-81800-01	<a href="#">HIT136</a>
Z175HP	06-01	175HP	68F-81800-01	<a href="#">HIT136</a>
Z200TLR	06-05	200HP	68F-81800-01	<a href="#">HIT136</a>
Z200TLR	2001	200HP	68F-81800-01	<a href="#">HIT136</a>
Z200HP	2000	200HP	68F-81800-01	<a href="#">HIT136</a>
Z200HP	08-01	200HP	68F-81800-01	<a href="#">HIT136</a>
Z250HP	2005	250HP	60X-81800-00	<a href="#">HIT123</a>
Z250HP	04-03	250HP	60V-81800-00	<a href="#">HIT123</a>



Z250HP  
Z250HP

06-05  
04-03

250HP  
250HP

60X-81800-00  
60V-81800-00

[HIT123](#)  
[HIT123](#)

BACK TO INDEX  
SELECT HERE



UP

